

# 1000BASE-T SFP Copper Transceiver

## Features

- Up to 1.25Gbps bi-directional data links
- SFP form with compact RJ-45 connector
- Single +3.3V power supply
- 1000 BASE-T operation in host systems with SERDES interface  
(MXP-24RJSX,MXP-24RJSDX)
- Link lengths: up to 100 meter
- Detailed product information in EEPROM
- Physical layer IC can be accessed via 2-wire serial bus
- For 100m reach over cat 5 UTP cable
- Low power consumption
- Power consumption less than 1W
- Operating case temperature: 0 ~ +70°C

## Applications

- 1.25 Gigabit Ethernet over Cat 5 cable

---

## Compliance

- Compatible with SFP MSA
- Compatible with IEEE Std 802.3
- ROHS

## Description

SFP-1G-T 1000BASE-T Copper Small Form Pluggable (SFP) modules are based on the SFP Multi Source Agreement (MSA). It is compliant with the Gigabit Ethernet and 1000BASE-T standards as specified in IEEE STD 802.3 and 802.3ab.

## Absolute Maximum Ratings

Table1-Absolute Maximum Ratings				
Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	Ts	-40	+85	°C
Operating Relative Humidity	RH	5	+85	%
Supply Voltage	Vcc	-0.5	+3.6	V

## Recommended Operating Conditions

Table2-Recommended Operating Conditions					
Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	TC	0	25	70	°C
Supply Current	Icc	300		350	mA
Power Supply Voltage	VCC	3.135	3.3	3.465	V
Surge Current	Isurge			30	mA

## Electrical Characteristic

Table3-Electrical Characteristic						
Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Differential Input Voltage	Vin p-p	500		2400	mV	
Differential Output Voltage	Vout p-p	500		1200	mV	
Data rate		10		1250	Mbps	
Bit Error Rate	BER		10 <sup>-10</sup>			
Low-Speed Signals, Electronic Characteristics						
SFP Output LOW	VOL	0		0.5	V	1
SFP Output HIGH	VOH	host_Vcc - 0.5		host_Vcc + 0.3	V	1
SFP Input LOW	VIL	0		0.8	V	1
SFP Input HIGH	VIH	2		Vcc +0.3	V	1
High-Speed Electrical Interface, Transmission Line-SFP						
Line Frequency	fL		125		MHz	2

Tx Output Impedance	Zout,TX		100		Ohm	3
Rx Input Impedance	Zin,RX		100		Ohm	3
High-Speed Electrical Interface, Host-SFP						
Single ended data input swing	Vin	250		1200	mV	
Single ended data output swing	Vout	350		800	mV	
Rise/Fall Time	Tr,Tf		175		psec	
Tx Input Impedance	Zin		50		Ohm	
Rx Output Impedance	Zout		50		Ohm	

Notes:

- [1] 4.7k to 10k pull-up to host\_Vcc, measured at host side of connector;
- [2] 5-level encoding, per IEEE 802.3
- [3] Differential, for all frequencies between 1MHz and 125MHz

## Pin Description

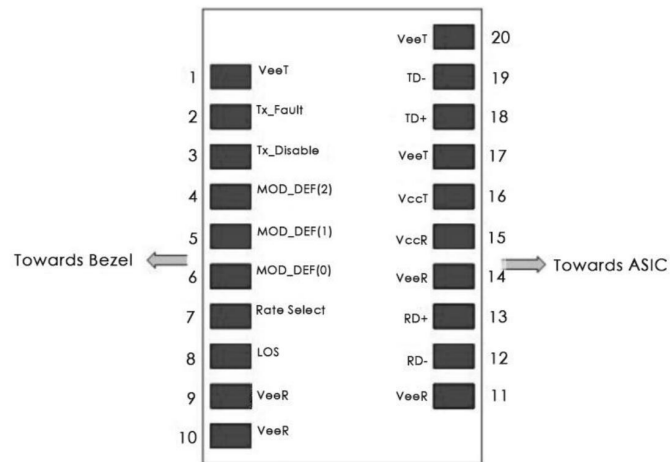


Figure1 Module Interface to Host

## SFP Module PIN Definition

Table4-SFP Module PIN Definition

	Symbol	Name / Description	Power Sequence Order	Note
1	VeeT	Module Transmitter Ground	1st	
2	TX_Fault	Module Transmitter Fault	3rd	
3	TX_Dis	Transmitter Disable; Turns off transmitter laser output	3rd	1
4	MOD-DEF2	Module Definition 2	3rd	2
5	MOD-DEF1	Module Definition 1	3rd	2
6	MOD-DEF0	Module Definition 0	3rd	2
7	Rate Select	Not used	3rd	
8	RX_LOS	Loss of Signal	3rd	
9	VeeR	Receiver Ground	3rd	
10	VeeR	Module Receiver Ground	1st	
11	VeeR	Module Receiver Ground	1st	
12	RD-	Receiver Inverted Data Output	3rd	
13	RD+	Receiver Data Output	3rd	
14	VeeR	Module Receiver Ground	1st	
15	VccR	Module Receiver 3.3 V Supply	2nd	
16	VccT	Module Receiver 3.3 V Supply	2nd	
17	VeeT	Module Transmitter Ground	1st	
18	TD+	Transmitter Non-Inverted Data Input	3rd	
19	TD-	Transmitter Inverted Data Input	3rd	
20	VeeT	Module Transmitter Ground	1st	

[1] PHY disabled on TDIS > 2.0V or open, enabled on TDIS < 0.8V, used to reset the module.

[2] Should be pulled up with 4.7k – 10k Ohm on host board to a voltage between 2.0 V and 3.6 V. MOD\_DEF[0] pulls line low to indicate module is plugged in .

## Monitoring Specification

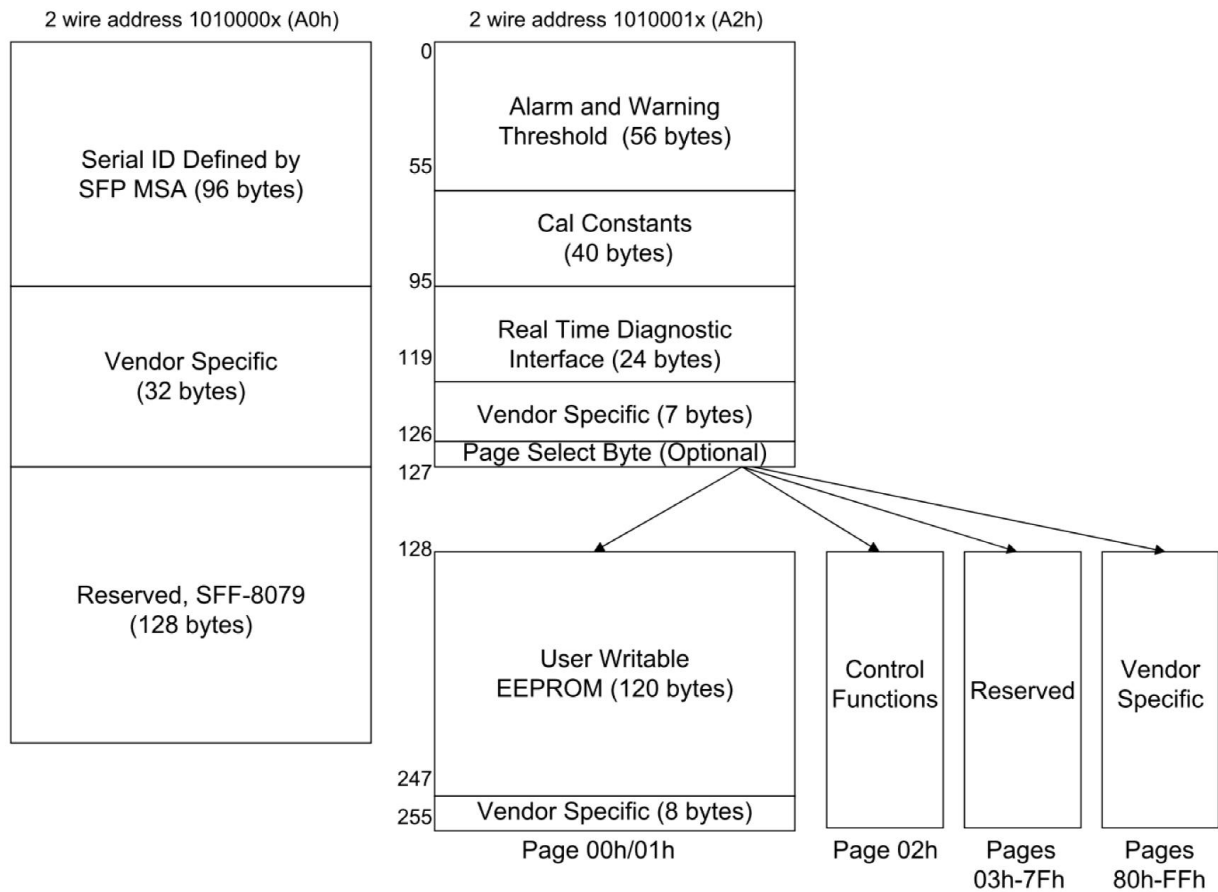


Figure2 Memory map

## Further Information:

---

Web [www.naddod.com](http://www.naddod.com)

Email For order requirements: [sales@naddod.com](mailto:sales@naddod.com)  
For customer service: [support@naddod.com](mailto:support@naddod.com)  
For technical support: [tech@naddod.com](mailto:tech@naddod.com)

For cooperation: [agency@naddod.com](mailto:agency@naddod.com)

For other informations: [info@naddod.com](mailto:info@naddod.com)

## Disclaimer

---

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
  2. Nothing herein should be construed as constituting an additional warranty.
  3. NADDOD assumes no responsibility for the use or reliability of equipment or software not provided by NADDOD.
- Copyright © NADDOD.COM All Rights Reserved, 2022