

32Gb/s SFP28 850nm 100m Optical Transceiver

Features

- Up to 28.05Gb/s data links
 - 850nm VCSEL laser and PIN receiver
 - Up to 100m on 50/125um MMF
 - Hot-pluggable SFP footprint
 - Support Digital Monitoring interface
 - Class 1 laser safety certified
 - Cost effective SFP28 solution, enables higher port densities and greater bandwidth
 - RoHS-10 compliant and lead-free
 - Single +3.3V power supply
 - 2-wire interface for management specifications compliant
- with SFF 8472 digital diagnostic monitoring interface for optical transceivers
- All-metal housing for superior EMI performance
 - Operating temperature range:0~+70°C

Applications

- High-speed storage area networks
- Computer cluster cross-connect
- Custom high-speed data pipes

Description

SFP-32G-SR transceiver consists of five sections: the LD driver, the limiting amplifier, the digital diagnostic monitor, the VCSEL laser and the PIN photo-detector. The module data link up to 100m in 50/125um multi-mode optical fiber.

The SFP-32G-SR module electrical interface is compliant to SFI electrical specifications. The transmitter input and receiver output impedance is 100 Ohms differential. Data lines are internally AC coupled. The module provides differential termination and reduce differential to common mode conversion for quality signal termination and low EMI. SFI typically operates over 200 mm of improved FR4 material or up to about 150mm of standard FR4 with one connector.

The transmitter converts 28.05Gbit/s serial PECL or CML electrical data into serial optical data compliant with the 32GBASE-SR standard. An open collector compatible Transmit Disable (Tx_Dis) is provided. Logic “1” or no connection on this pin will disable the laser from transmitting. Logic “0” on this pin provides normal operation. The transmitter has an internal automatic power control loop (APC) to ensure constant optical power output across supply voltage and temperature variations. An open collector compatible Transmit Fault (Tx_Fault) is provided. TX_Fault is module output contact that when high, indicates that the module transmitter has detected a fault condition related to laser operation or safety. The TX_Fault output contact is an open drain/collector and shall be pulled up to the Vcc_Host in the host with a resistor in the range 4.7-10 k Ω . TX_Disable is a module input contact. When TX_Disable is asserted high or left open, the SFP28 module transmitter output shall be turned off. This contact shall be pulled up to VccT with a 4.7 k Ω to 10 k Ω resistor.

The receiver converts 28.05Gbit/s serial optical data into serial PECL/CML electrical data. An open collector compatible Loss of Signal is provided. Rx_LOS when high indicates an optical signal level below that specified in the relevant standard. The Rx_LOS contact is an open drain/collector output and shall be pulled up to Vcc_Host in the host with a resistor in the range 4.7-10 k Ω , or with an active termination. Power supply filtering is recommended for both the transmitter and receiver. The Rx_LOS signal is intended as a preliminary indication to the system in which the 32GFC SFP28 SR is installed that the received signal strength is below the specified range. Such an indication typically points to non-installed cables, broken cables, or a disabled, failing or a powered off transmitter at the far end of the cable.

Absolute Maximum Ratings

Table1-Absolute Maximum Ratings					
Parameter	Symbol	Min.	Max.	Unit	Notes
Storage Temperature	Ts	-40	+85	°C	
Power Supply Voltage	VCC	-0.5	+3.6	V	
Relative Humidity(non-condensation)	RH	5	95	%	
Damage Threshold	TH _d	3		dBm	

Recommended Operating Conditions

Parameter	Symbols	Min.	Typical	Max.	Unit	Notes
Operating Case temperature	T _{op}	0		+70	°C	
Power Supply Voltage	V _{cc}	3.135	3.3	3.465	V	
Data Rate			28.05		Gbps	
Control Input Voltage High		2		V _{cc}	V	
Control Input Voltage Low		0		0.8	V	
Link Distance(MMF)	D			100	m	50/125um

Electrical Characteristic

The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Power Consumption	p			1	W	
Supply Current	I _{cc}			300	mA	
Transmitter						
Single-ended Input Voltage Tolerance	V _{cc}	-0.3		4.0	V	
common mode voltage tolerance		15			mV	
Differential Input Voltage Swing	V _{in,pp}	180		700	mV	
Differential Input Impedance	Z _{in}	90	100	110	Ohm	1
Transmit Disable Assert Time				100	us	
Transmit Disable Voltage	V _{dis}	V _{cc} -1.3		V _{cc}	V	
Transmit Enable Voltage	V _{en}	V _{ee}		V _{ee} +0.8	V	2
Receiver						
Single-ended Input Voltage Tolerance	V _{cc}	-0.3		4.0	V	
Differential Output Voltage Swing	V _{out,pp}	300		900	mV	
Differential Output Impedance	Z _{out}	90	100	110	Ohm	3
Data output rise/fall time	Tr/Tf	9.5			ps	4
LOS Assert Voltage	V _{losH}	V _{cc} -1.3		V _{cc}	V	5
LOS De-assert Voltage	V _{losL}	V _{ee}		V _{ee} +0.8	V	5

Notes:

- [1] Connected directly to TX data input pins. AC coupled thereafter.
- [2] Or open circuit.
- [3] Input 100 ohms differential termination.
- [4] These are unfiltered 20-80% values.
- [5] Loss of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

Optical Characteristics

Table4-Optical Characteristics						
Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Optical transmitter Characteristics						
Center Wavelength	λ_c	840	850	860	nm	
Optical Spectral Width	$\Delta \lambda$			0.6	nm	
Average Optical Power	P_{AVG}	-8.4		2.4	dBm	1
Extinction Ratio	ER	2.0			dB	
Transmitter OFF Output Power	P_{off}			-30	dBm	
Transmitter and Dispersion Penalty	TDP			4.4	dB	
Optical Return Loss Tolerance	ORLT			12	dB	
Transmitter Eye Mask		Compliant with IEEE802.3ae				
Optical receiver Characteristics						
Center Wavelength	λ_c	840	850	860	nm	
Sensitivity (Average Power)	Sen.			-10	dBm	2
Stressed Sensitivity (OMA)				-5.2	dBm	2
Input Saturation Power(overload)	P_{sat}	0.5			dBm	
LOS Assert	LOSA	-30			dBm	
LOS De-assert	LOSD			-13	dBm	
Optical Return Loss	ORL	12			dB	
LOS Hysteresis	LOSH	0.5			dB	

Notes:

[1] Class 1 Laser Safety per FDA/CDRH and IEC-825-1 regulations.

[2] Measured with Light source 850nm, ER=2.0dB; BER =5E-5@ PRBS=2³¹-1 NRZ.

Pin Description

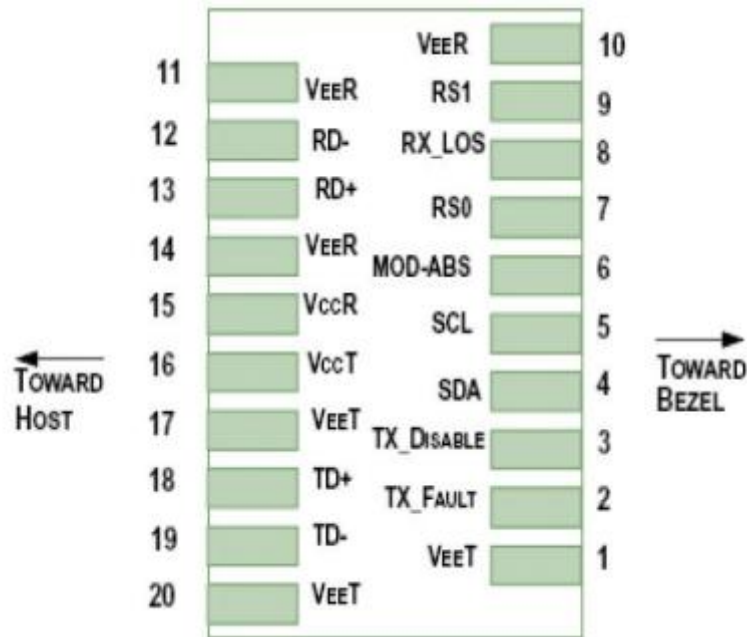


Figure1 Pin view

Pin Function Definitions

PIN	Name	Description	Notes
1	VeeT	Transmitter Ground	1
2	TX_Fault	Transmitter Fault	
3	TX_Disable	Transmitter Disable; Turns off transmitter laser output	
4	SDA	Two wire serial interface Data Line (LVCMOS-I/O) (MOD-DEF2)	2
5	SCL	Two wire serial interface Clock Line (LVCMOS-I/O) (MOD-DEF1)	2
6	MOD_ABS	Module Definition, Grounded in the module	
7	RS0	Rx Rate Select:	
8	RX_LOS	Receiver Loss of Signal Indication Active LOW	
9	RS1	Transmitter Rate Select (not used)	
10	VeeR	Receiver Ground	1
11	VeeR	Receiver Ground	1
12	RD-	Receiver Inverted Data Output	
13	RD+	Receiver Data Output	
14	VeeR	Receiver Ground	1
15	VccR	Receiver Power - +3.3V	
16	VccT	Transmitter Power - +3.3 V	

17	VeeT	Transmitter Ground	1
18	TD+	Transmitter Non- Inverted Data Input	
19	TD-	Transmitter Inverted Data Input	
20	VeeT	Transmitter Ground	1

Notes:

[1] Module ground pins GND are isolated from the module case.

[2] Shall be pulled up with 4.7K- 10Kohms to a voltage between 3. 15V and 3.45V on the host board.

Digital Diagnostic Functions

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified.

Table6-Digital Diagnostic Functions					
Parameter	Symbols	Min	Max	Unit	Notes
Temperature monitor	DMI_Temp	-3	3	degC	Over operating temp
Supply voltage monitor	DMI_VCC	-0.15	0.15	V	Full operating range
RX power monitor	DMI_RX	-3	3	dB	
Bias current monitor	DMI_bias	-10%	10%	mA	
TX power monitor	DMI_TX	-3	3	dB	

Mechanical Dimensions

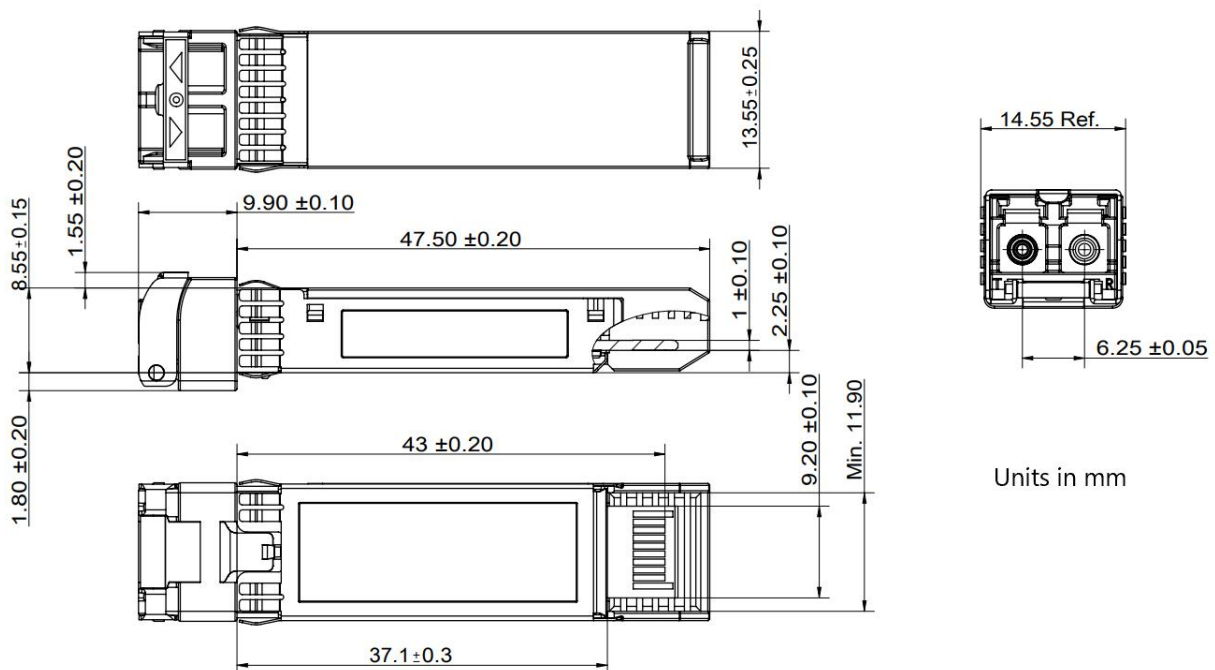


Figure2 Mechanical Outline

Further Information:

Web www.naddod.com

Email For order requirements: sales@naddod.com

For cooperation: agency@naddod.com

For customer service: support@naddod.com

For other informations: info@naddod.com

For technical support: tech@naddod.com

Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.

2. Nothing herein should be construed as constituting an additional warranty.

3. NADDOD assumes no responsibility for the use or reliability of equipment or software not provided by NADDOD.

Copyright © NADDOD.COM All Rights Reserved, 2022