

# 10Gb/s SFP+ ZR 1550nm 80km Optical Transceiver

## Features

- Up to 80km transmission distance
- Support Multi Rate 9.95 to 11.3Gbps bit rates
- 1550nm cooled EML transmitter with TEC, APD receiver
- SFI electrical interface
- Hot pluggable
- SFP+ MSA package with duplex LC connector
- Very low EMI and excellent ESD protection
- +3.3V power supply
- Power consumption less than 1.5W
- Operating case temperature: 0~+70°C

## Applications

- 10G Fiber Channel
- 10GBASE-ZR

---

## Compliance

- Compliant with SFF-8431 & SFF-8432 & SFF-8472

## Description

SFP-10G-ZR is a high performance, cost effective modules, which is supporting Multi Rates 9.95 to 11.3Gbps, and transmission distance up to 80km on SM fiber. The transceiver consists of two sections. The transmitter section incorporates a EML laser driver and a1550nm DFB laser. There receiver section consists of a APD photo-diode integrated with a trans impedance preamplifier (TIA) and a Limiting Amplifier. The module is hot plug gable into the 20-pin connector. The high-speed electrical interface is based on low voltage logic, with nominal 100 Ohms differential impedance and AC coupled in the module.

The optical output can be disabled by LVTTTL logic high-level input of TX\_DIS. Transmit Fault (Tx\_Fault) is provided to indicate that the module transmitter has detected a fault condition related to laser operation or safety. Loss of signal (RX\_LOS) output is provided to indicate the loss of an input optical signal of receiver. A serial EEPROM in the transceiver allows the user to access transceiver monitoring and configuration data via the 2-wire SFP Management Interface. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

## Absolute Maximum Ratings

Table1-Absolute Maximum Ratings				
Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	Ts	-40	+85	°C
Relative Humidity(Non-condensing)	RH	+0	+85	%

## Recommended Operating Conditions

Table2-Recommended Operating Conditions						
Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Operating Case Temperature	TC	0	25	+70	°C	
Power Supply Voltage	VCC3	3.135	3.3	3.465	V	
Power Supply Current	ICC3			450	mA	
Power Consumption				1500	mW	

## Transmitter Operating Characteristic-Optical

Table3-Transmitter Operating Characteristic-Optical						
Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Operating Data Rate	DR	9.95		11.3	Gb/s	
Output Center Wavelength	$\lambda_c$	1530	1550	1565	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Spectral Width	$\sigma$			1	nm	

Average Output Power	Po	0		4	dBm	
Disabled Power	Poff			-30	dBm	
Extinction Ratio	ER	9			dB	
Eye Mask			5		%	
Relative Intensity Noise	RIN			-128	dB/Hz	
Operating Distance		80			km	
Transmitter and dispersion penalty				3	dB	
Dispersion tolerance				1600	ps/nm	
Optical return loss tolerance				21	dB	

## Receiver Operating Characteristic-Optical

**Table4-Receiver Operating Characteristic-Optical**

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Input Center Wavelength	lrc	1260		1565	nm	
Overload	Rovl	-7			dBm	
Sensitivity	Rsen			-22	dBm	
RX_LOS Assert Level	RLOSa	-37			dBm	
RX_LOS De-Assert Level	RLOSd			-26	dBm	
RX_LOS Hysteresis	RLOSh	0.5			dB	

## Electrical characteristics

**Table5-Electrical characteristics**

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Input differential impedance			100		$\Omega$	
Differential data input swing	VI	190		700	mV	
Differential data output swing	VO	300		850	mV	
Tx Fault, LOS Output Voltage	Low	Vee		Vee+0.8	V	
	High	Vcc-0.8		Vcc	V	
Tx Disable, RS0,RS1	Low	VIL		Vee+0.8	V	
	High	VIH		Vcc	V	

## Digital Diagnostic Functions

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF-8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales staff.

Table6-Digital diagnostic specification					
Parameter	Symbol	Min.	Max	Unit	Notes
Temperature monitor absolute error	DMI_Temp	-3	3	°C	Over operating temp
Laser power monitor absolute error	DMI_TX	-3	3	dB	
RX power monitor absolute error	DMI_RX	-3	3	dB	-7dBm to -24dBm range
Supply voltage monitor absolute error	DMI_VCC	-1	1	V	Full operating range
Bias current monitor	DMI_Ibias	-10	10	%	

## Pin Description

The SFP+ modules are hot-pluggable. The SFP+ host connector is a 0.8 mm pitch 20 position right angle improved connector specified by SFF-8431, or stacked connector with equivalent electrical performance. Host PCB contact assignment is shown in Figure 1 and contact definitions are given in Table7.SFP+ module contacts mates with the host in the order of ground, power, followed by signal as illustrated by Figure 2 and the contact sequence order listed in Table7.

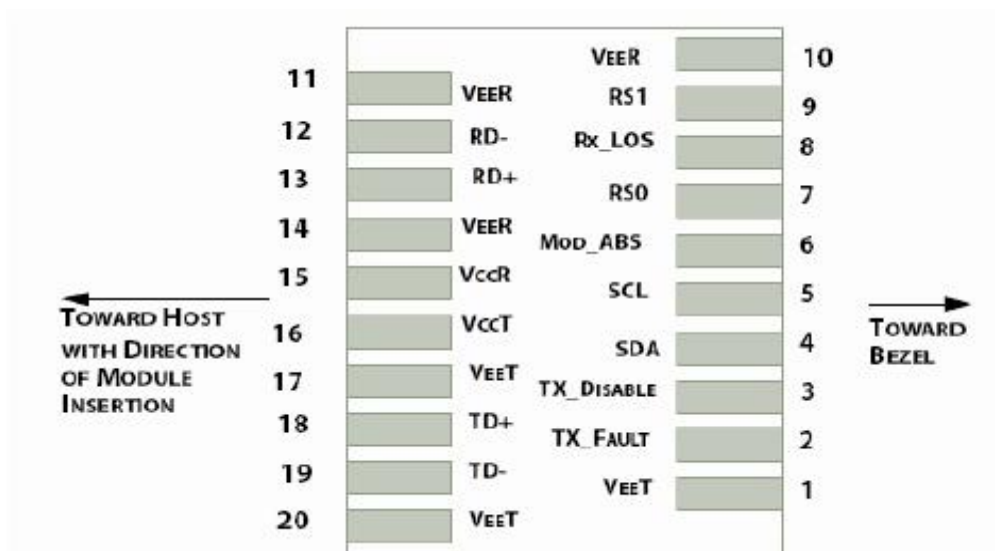


Figure1 Module Interface to Host

## Pin Assignment

PIN	Logic	Symbol	Name / Description	Power Sequence Order	Notes
1		VeeT	Module Transmitter Ground	1st	1
2	LVTTTL-O	TX_Fault	Module Transmitter Fault	3rd	2
3	LVTTTL-I	TX_Dis	Transmitter Disable; Turns off transmitter laser output	3rd	
4	LVTTTL-I/O	SDA	2-Wire Serial Interface Data Line	3rd	
5	LVTTTL-I	SCL	2-Wire Serial Interface Clock	3rd	
6		MOD_ABS	Module Absent, connected to VeeT or VeeR in the module	3rd	2
7	LVTTTL-I	RS0	Not used	3rd	
8	LVTTTL-O	RX_LOS	Receiver Loss of Signal Indication Active High	3rd	2
9	LVTTTL-I	RS1	Not used	3rd	
10		VeeR	Module Receiver Ground	1st	1
11		VeeR	Module Receiver Ground	1st	1
12	CML-O	RD-	Receiver Inverted Data Output	3rd	
13	CML-O	RD+	Receiver Data Output	3rd	
14		VeeR	Module Receiver Ground	1st	1
15		VccR	Module Receiver 3.3 V Supply	2nd	
16		VccT	Module Receiver 3.3 V Supply	2nd	
17		VeeT	Module Transmitter Ground	1st	1
18	CML-I	TD+	Transmitter Non-Inverted Data Input	3rd	
19	CML-I	TD-	Transmitter Inverted Data Input	3rd	
20		VeeT	Module Transmitter Ground	1st	1

[1] Module ground pins GND are isolated from the module case.

[2] Shall be pulled up with 4.7K-10KΩ to a voltage between 3.13V and 3.47V on the host board.

## Monitoring Specification

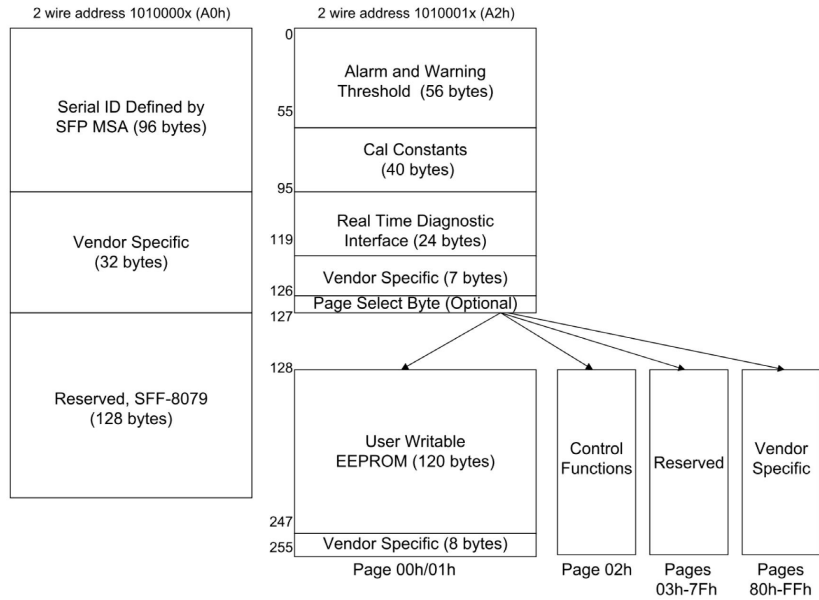


Figure2 Memory map

## Mechanical specifications

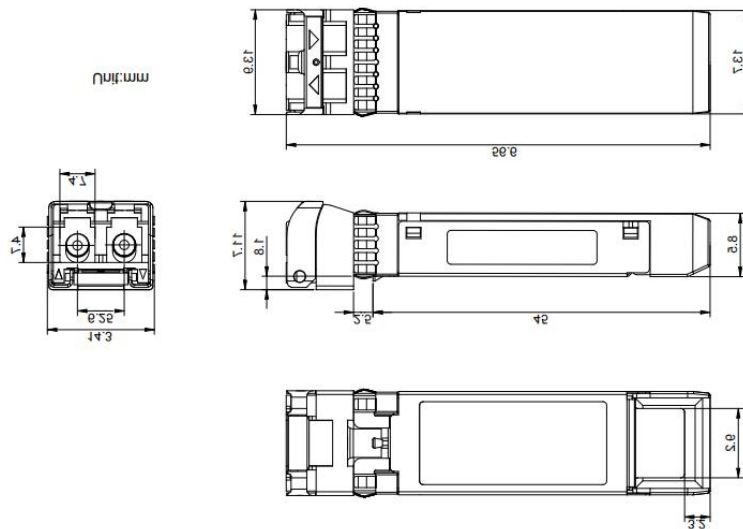


Figure3 Mechanical specifications

## Further Information:

---

Web [www.naddod.com](http://www.naddod.com)

Email For order requirements: [sales@naddod.com](mailto:sales@naddod.com)

For cooperation: [agency@naddod.com](mailto:agency@naddod.com)

For customer service: [support@naddod.com](mailto:support@naddod.com)

For other informations: [info@naddod.com](mailto:info@naddod.com)

For technical support: [tech@naddod.com](mailto:tech@naddod.com)

## Disclaimer

---

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.

2. Nothing herein should be construed as constituting an additional warranty.

3. NADDOD assumes no responsibility for the use or reliability of equipment or software not provided by NADDOD.

Copyright © NADDOD.COM All Rights Reserved, 2022