

# 1.25Gb/s SFP DWDM C17-C61 80km Optical Transceiver

## Features

- Hot-Pluggable
- Duplex LC connector
- Up to 2.67Gb/s data rate
- 100GHz ITU Grid, C Band
- DWDM COOLED DFB transmitter, PIN photo-detector
- SMF links up to 80km
- 2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface
- Power Supply :+3.3V
- Power consumption<1.5W
- Temperature Range: 0~ 70°C
- RoHS compliant

## Applications

- 1G Fibre channel
- DWDM Networks

---

## Compliance

- SFP MSA
- SFF-8472
- IEEE802.3z
- RoHS

## Description

The SFP-1G-DW80 is a very compact 1.25Gb/s optical transceiver module for serial optical communication applications at 1.25Gb/s. The DWDM-SFP1G-ZX converts a 1.25Gb/s serial electrical data stream to 2.67Gb/s optical output signal and a 1.25Gb/s optical input signal to 1.25Gb/s serial electrical data streams. The high speed 2.67Gb/s electrical interface is fully compliant with SFI specification. The high performance DWDM COOLED DFB transmitter and high sensitivity PIN receiver provide superior performance for Ethernet applications at up to 80km links.

The SFP Module compliance with SFF-8431, SFF-8432 Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

The fully SFP compliant form factor provides hot pluggability, easy optical port upgrades and low EMI emission.

## Absolute Maximum Ratings

Table1-Absolute Maximum Ratings					
Parameter	Symbol	Min.	Typical	Max.	Unit
Storage Temperature	TS	-40		+85	°C
Case Operating Temperature	TA	0		70	°C
Maximum Supply Voltage	VCC	-0.5		4	V
Relative Humidity	RH	0		85	%

## Electrical Characteristics(TOP = 0 to 70 °C, VCC = 3.135 to 3.465 Volts)

Table2-Electrical Characteristics						
Parameter	Symbol	Min.	Typical	Max.	Unit	Ref.
Supply Voltage	Vcc	3.135		3.465	V	
Supply Current	Icc			450	mA	
Power Consumption	P			1.5	W	
Transmitter						
Input differential impedance	Rin		100		Ω	1
Tx Input Single Ended DC Voltage Tolerance [ Ref VeeT]	V	-0.3		4	V	
Differential input voltage swing	Vin, pp	180		700	mV	2
Transmit Disable Voltage	VD	2		Vcc	V	3
Transmit Enable Voltage	VEN	Vee		Vee+0.8	V	
Receiver						
Single Ended Output Voltage Tolerance	V	-0.3		4	V	
Rx Output Diff Voltage	Vo	300		850	mV	
Rx Output Rise and Fall Time	Tr/Tf	30			ps	4

LOS Fault	VLOS fault	2		V <sub>CCHOST</sub>	V	5
LOS Normal	VLOS norm	V <sub>ee</sub>		V <sub>ee</sub> +0.8	V	5

**Notes:**

[1] Connected directly to TX data input pins. AC coupling from pins into laser driver IC.

[2] Per SFF-8431 Rev 3.0.

[3] Into 100 ohms differential termination.

[4] 20 – 80 %

[5] LOS is an open collector output. Should be pulled up with 4.7k – 10kΩ on the host board. Normal operation is logic 0; loss of signal is logic 1. Maximum pull-up voltage is 5.5V.

## Optical Characteristic(TOP = 0 to 70°C, VCC = 3.135 to 3.465 Volts)

Table3-Optical Characteristic						
Parameter	Symbol	Min.	Typical	Max.	Unit	Ref
Transmitter						
Optical Wavelength-End Of Life	$\lambda$	X- 100	X	X+100	pm	
Optical Wavelength-Beginning Of Life	$\lambda$	X-25	X	X+25	pm	
Average Optical Power	P <sub>avg</sub>	0		+5	dBm	1
Laser Off Power	P <sub>off</sub>			-30	dBm	
Extinction Ratio	ER	8.2			dB	
Transmitter Dispersion Penalty	TDP			3.0	dB	
Relative Intensity Noise	R <sub>in</sub>			- 128	dB/Hz	2
Optical Return Loss Tolerance		20			dB	
Receiver						
Center Wavelength	$\lambda_r$	1480		1580	nm	
Receiver Sensitivity (OMA)	Sen			-24	dBm	2
Stressed Sensitivity (OMA)	SenST			-21	dBm	2
Los Assert	LOSA	-40			dBm	
Los Dessert	LOSD			-24	dBm	
Los Hysteresis	LOSH	0.5			dB	
Overload	Sat	-3			dBm	3
Receiver Reflectance	R <sub>rx</sub>			- 12	dB	

**Notes:**

[1] Average power figures are informative only Fibre channel.

[2] 12dB reflection.

[3] Receiver overload specified in OMA and under the worst comprehensive stressed condition.

## Timing Characteristics

Table4-Timing Characteristics					
Parameter	Symbol	Min.	Typical	Max.	Unit

TX_Disable Assert Time	t_off			10	us
TX_Disable Negate Time	t_on			1	ms
Time to Initialize Include Reset of TX_FAULT	t_int			300	ms
TX_FAULT from Fault to Assertion	t_fault			100	us
TX_Disable Time to Start Reset	t_reset	10			us
Receiver Loss of Signal Assert Time	T <sub>A</sub> , RX_LOS			100	us
Receiver Loss of Signal Deassert Time	T <sub>d</sub> , RX_LOS			100	us
Rate- Select Chage Time	t_ratesel			10	us
Serial ID Clock Time	t_serial-clock			100	kHz

## Pin Assignment

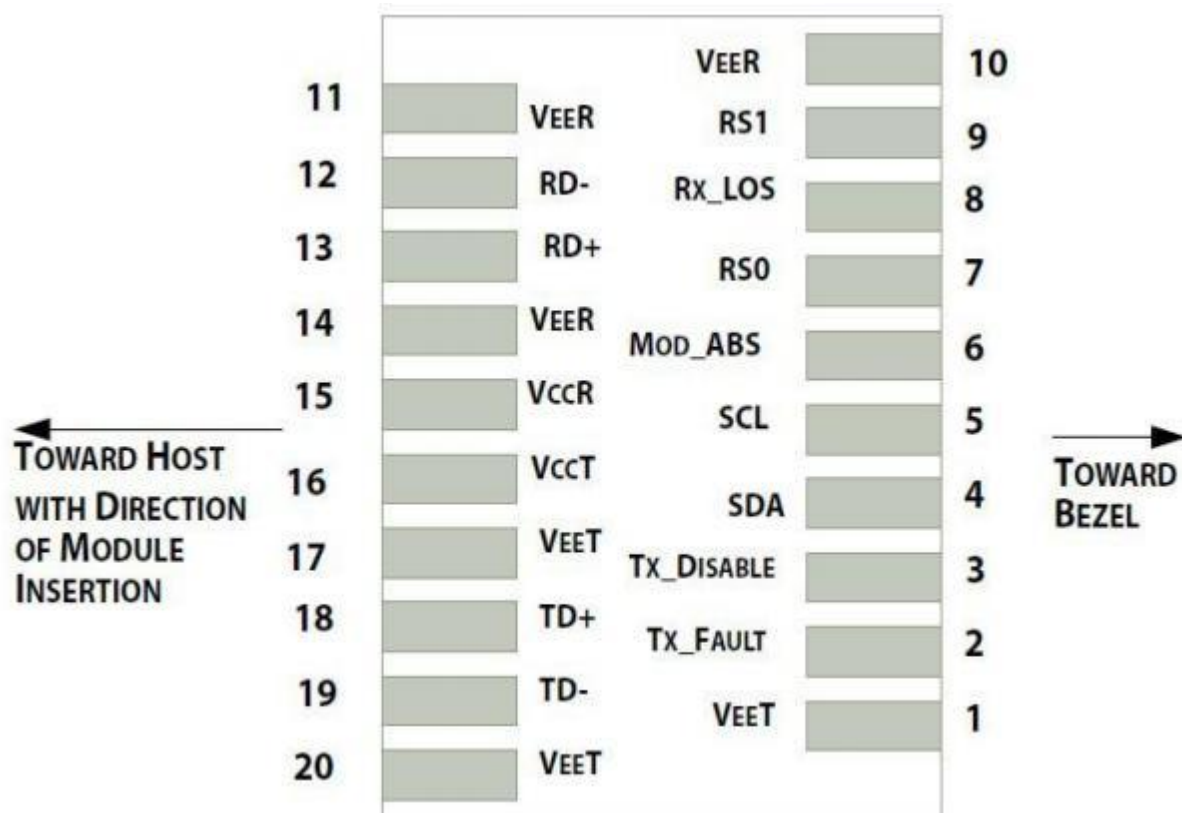


Figure 1 Diagram of Host Board Connector Block Pin Numbers and Names

## Pin Function Definitions

Table5-Pin Function Definitions

PIN	Name	Function	Notes
1	VeeT	Module transmitter ground	1
2	Tx Fault	Module transmitter fault	2
3	Tx Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDL	2 wire serial interface data input/output (SDA)	

5	SCL	2 wire serial interface clock input (SCL)	
6	MOD- ABS	Module Absent, connect to VeeR or VeeT in the module	2
7	RS0	Rate select0, optionally control SFP receiver. When high, input data rate $\rightarrow 4.5\text{Gb/s}$ ; when low, input data rate $\leftarrow 4.5\text{Gb/s}$	
8	LOS	Receiver Loss of Signal Indication	4
9	RS1	Rate select0, optionally control SFP transmitter. When high, input data rate $> 4.5\text{Gb/s}$ ; when low, input data rate $\leq 4.5\text{Gb/s}$	
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1
18	TD+	Transmitter inverted data out put	
19	TD-	Transmitter non-inverted data out put	
20	VeeT	Module transmitter ground	1

**Notes:**

[1] The module ground pins shall be isolated from the module case.

[2] This pin is an open collector/drain output pin and shall be pulled up with 4.7K- 10Kohms to Host\_Vcc on the host board.

[3] This pin shall be pulled up with 4.7K- 10Kohms to VccT in the module.

[4] This pin is an open collector/drain output pin and shall be pulled up with 4.7K- 10Kohms to Host\_Vcc on the host board.

## SFP Module EEPROM Information and Management

The SFP modules implement the 2-wire serial communication protocol as defined in the SFF-8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I2C interface at address A0h and A2h. The memory is mapped in Figure 2. Detailed ID information (A0h) is listed in Table 6. And the DDM specification at address A2h. For more details of the memory map and byte definitions, please refer to the SFF-8472, "Digital Diagnostic Monitoring Interface for Optical Transceivers". The DDM parameters have been internally calibrated.

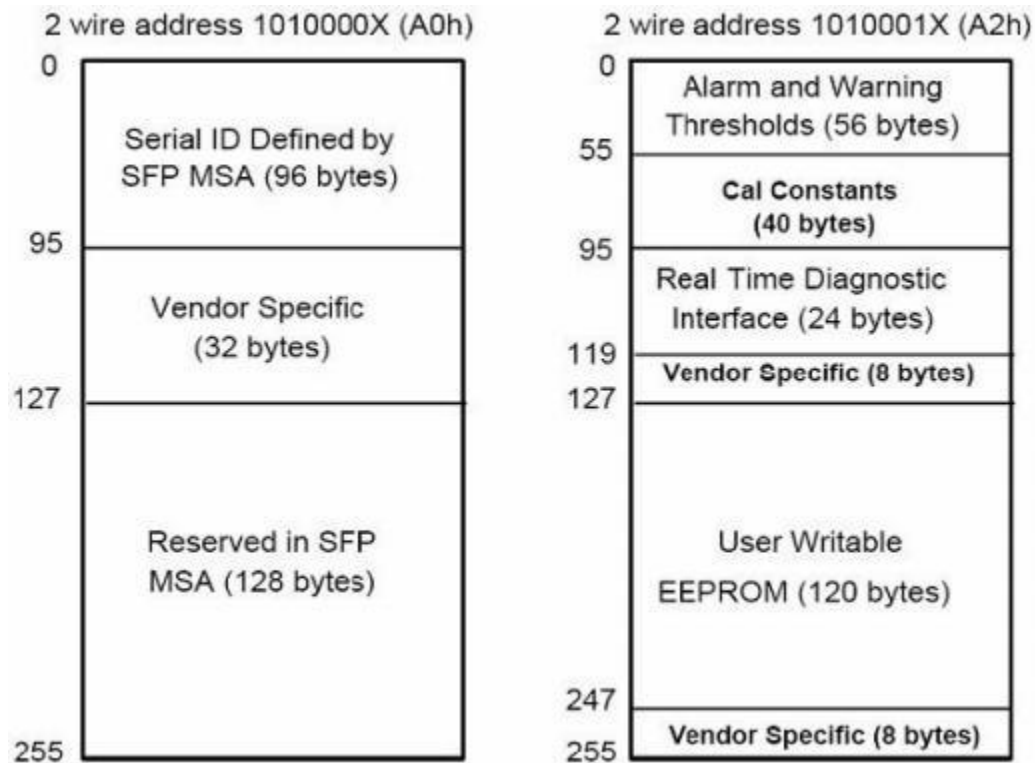


Figure 2 Digital Diagnostic Memory Map (Specific Data Field Descriptions)

**Table6-EEPROM Serial ID Memory Contents (A0h)**

Data Address	Length(Byte)	Name of Length	Description and Contents
Base ID Fields			
0	1	Identifier	Type of Serial transceiver (03h=SFP)
1	1	Reserved	Extended identifier of type serial transceiver (04h)
2	1	Connector	Code of optical connector type (07=LC)
3- 10	8	Transceiver	10G Base-ZR
11	1	Encoding	64B/66B
12	1	BR, Nominal	Nominal baud rate, unit of 100Mbps
13- 14	2	Reserved	(0000h)
15	1	Length(9um)	Link length supported for 9/125um fiber, units of 100m

16	1	Length(50um)	Link length supported for 50/125um fiber, units of 10m
17	1	Length(62.5um)	Link length supported for 62.5/125um fiber, units of 10m
18	1	Length( Copper)	Link length supported for copper, units of meters
19	1	Reserved	
20-35	16	Vendor Name	SFP vendor name
36	1	Reserved	
37-39	3	Vendor OUI	
40-55	16	Vendor PN	Part Number: "CWDM-SFP1G-ZX-xx" (ASCII)
56-59	4	Vendor rev	
60-62	3	Reserved	
63	1	CCID	Least significant byte of sum of data in address 0-62
Extended ID Fields			
64-65	2	Option	Indicates which optical SFP signals are implemented(001Ah= LOS, TX_FAULT, TX_DISABLE all supported)
66	1	BR, max	Upper bit rate margin, units of %
67	1	BR, min	Lower bit rate margin, units of %
68-83	16	Vendor SN	
84-91	8	Date code	Manufacturing date code
92-94	3	Reserved	
95	1	CCEX	Check code for the extended ID Fields (addresses 64 to 94)
Vendor Specific ID Fields			
96- 127	32	Readable	specific date, read only
128-255	128	Reserved	

## Digital Diagnostic Monitor Characteristics

Table7-Digital Diagnostic Monitor Characteristics			
Data Address	Parameter	Accuracy	Unit
96-97	Transceiver Internal Temperature	±3.0	°C
98-99	VCC3 Internal Supply Voltage	±3.0	%
100- 101	Laser Bias Current	±10	%
102- 103	Tx Output Power	±3.0	dB
104- 105	Rx Input Power	±3.0	dB

## Regulatory Compliance

The SFP-1G-DW80 complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following)

Electrostatic Discharge(ESD) to the Electrical Pins	MIL-STD-883 E Method 3015.7	Class 1(>1000 V)
Electrostatic Discharge (ESD) to the Duplex LC Receptacle	IEC 61000-4-2GR-1089-CORE	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN55022 Class B (CISPR 22B)VCCI Class B	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10 and 1040.11 EN60950, EN (IEC) 60825-1,2	Compatible with Class 1 laser product.

## Recommend Circuit

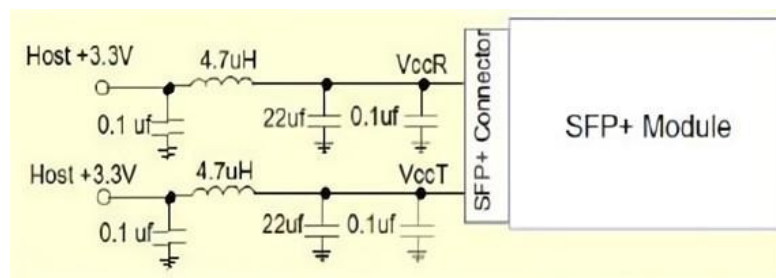


Figure 3 Recommended Host Board Power Supply Circuit


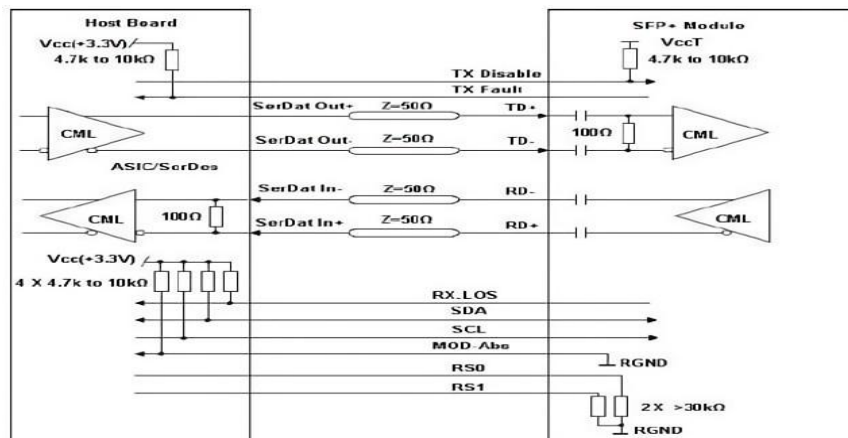


Figure 4 Recommended High-speed Interface Circuit

## Mechanical Dimensions

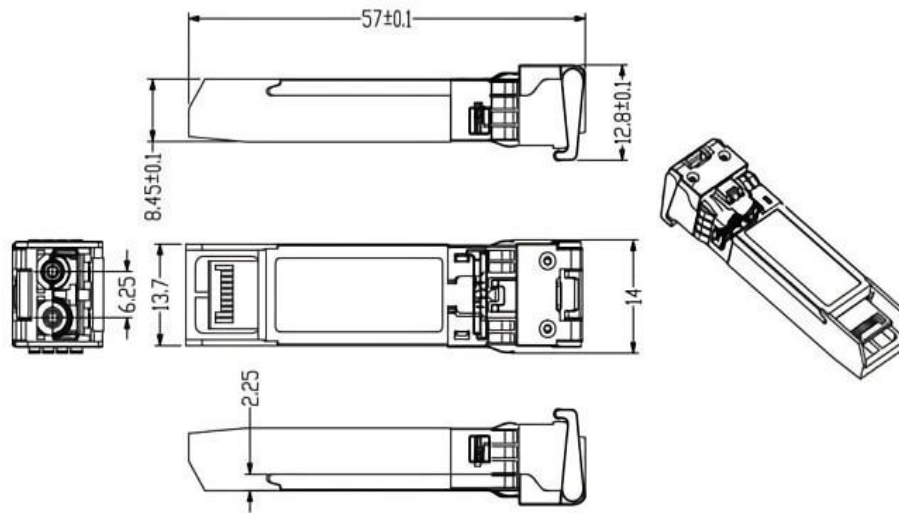

## Further Information:

---

Web [www.naddod.com](http://www.naddod.com)

Email For order requirements: [sales@naddod.com](mailto:sales@naddod.com)  
For customer service: [support@naddod.com](mailto:support@naddod.com)  
For technical support: [tech@naddod.com](mailto:tech@naddod.com)

For cooperation: [agency@naddod.com](mailto:agency@naddod.com)

For other informations: [info@naddod.com](mailto:info@naddod.com)

## Disclaimer

---

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.

2. Nothing herein should be construed as constituting an additional warranty.

3. NADDOD assumes no responsibility for the use or reliability of equipment or software not provided by NADDOD.

Copyright © NADDOD.COM All Rights Reserved, 2022