

25Gb/s SFP28 ER 1310nm 30km Industrial Optical Transceiver

Features

- Compliant to SFP28 MSA
- Fully ROHS Compliant
- All Metal Housing for Superior EMI Performance
- Operating Data 25.78125Gbps±100 ppm
- Cooled DML DFB Laser and APD Receiver
- LC Duplex Connector
- Hot Pluggable 20pin Connector
- Low Power Consumption <2.0W
- -40°C to 85°C Operating Wide Temperature Range
- Single +3.3V Power Supply
- Digital Monitoring SFF-8472 Rev 10.2 Compliant
- Real Time Monitoring of Transmitted Optical Power Received Optical Power ; Laser Bias Current
Temperature ;Supply Voltage

Applications

- 25GBASE ER
- CPRI Option 10 / eCPRI

Compliance

- SFF-8472&SFF-8431&SFF8432

Description

The SFP-25GI-ERL Transceiver is designed for use in Ethernet/eCPRI/ CPRI links up to 25.78 Gb/s data rate and up to 30km link length. They are compliant with SFF8472, SFF-8431, SFF-8432. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

Absolute Maximum Ratings

Table1-Absolute Maximum Ratings				
Parameter	Symbol	Min.	Max.	Unit
Storage Temperature Range	T _S	-40	85	°C
Relative Humidity	RH	0	95	%

Optical Characteristics(TOP = 0 to 70°C, VCC = 3.00 to 3.60 Volts)

Table2-Optical Characteristics						
Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter						
Center Wavelength	λ	1295		1310	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Optical Output Power	P _{av}	-3		6	dBm	
Extinction Ratio	ER	4			dB	
Transmitter and Dispersion Penalty	TDP			2.7	dB	
Average Launch Power of OFF Transmitter	P _{OFF}			-30	dBm	
Relative Intensity Noise	RIN _{20OMA}			-130	dB/Hz	
Receiver						
Center Wavelength	λ	1295		1325	nm	
Receiver Sensitivity	R _{sen}			-14	dBm	1
Maximum Input Power		-4			dBm	
Optical Return Loss		27			dB	
Assert LOS	LOS _A	-35			dBm	
De-Assert LOS	LOS _D			-19	dBm	
LOS Hysteresis		0.5		6	dB	


Qualification Reliability

Table3-Qualification Reliability		
Feature	Test Method	Performance
Electrostatic Discharge (ESD) to The Electrical Pins	MIL-STD-883C Method 3015.4	Class1 (→1KV) for high speed I/O pins Class 1 (>2KV) for all other pins
Electrostatic Discharge (ESD) to The Duplex LC Receptacle	Variation of IEC 61000- 4-2	The SFP28 modules meet ESD requirements given in EN61000-4-2, criterion B test specification such that units are subjected to 15kV air discharges during operation and 8kV direct contact discharges to the case.
Electromagnetic Interference (EMI)	CISPR22 ITE Class BEN55022 Class B	Compliant with standards
EMC		FCC Class B/CE Class B
Immunity	IEC61000-4-3 Class 2EN55024	Typically show no measurable effect from a 3V/m field swept from 80 to 1000MHz applied to the transceiver without a chassis enclosure.


Environmental Safety

Table4-Environmental Safety		
Feature	Test Method	Performance
ROHS Compliance		han 1000 ppm of cadmium, lead, mercury, hexavalent chromium, polybrominated biphenyls, and polybrominated biphenyl ethers.

Typical Application Circuit

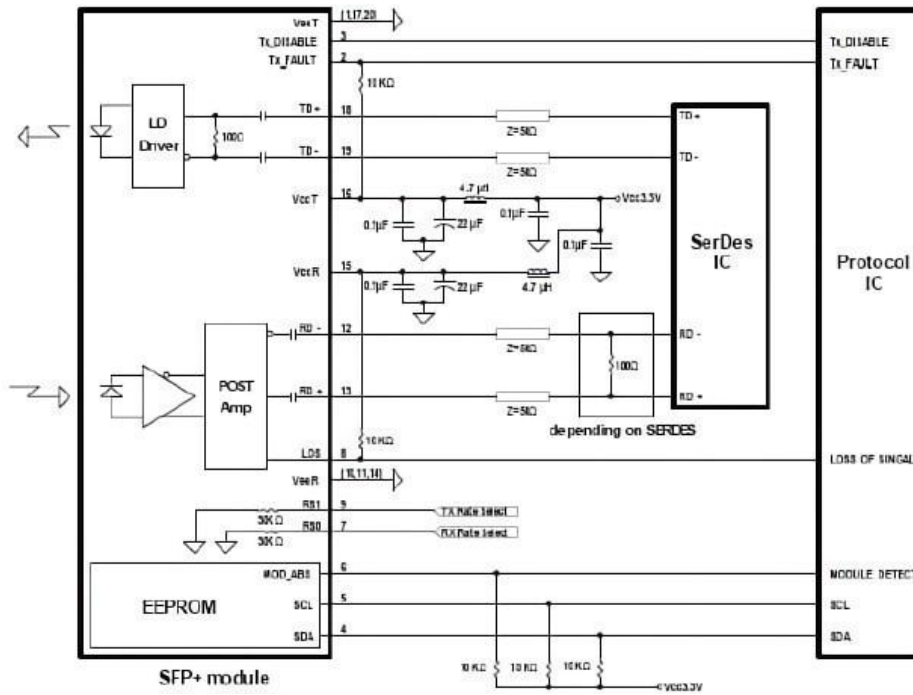

Mechanical Dimensions

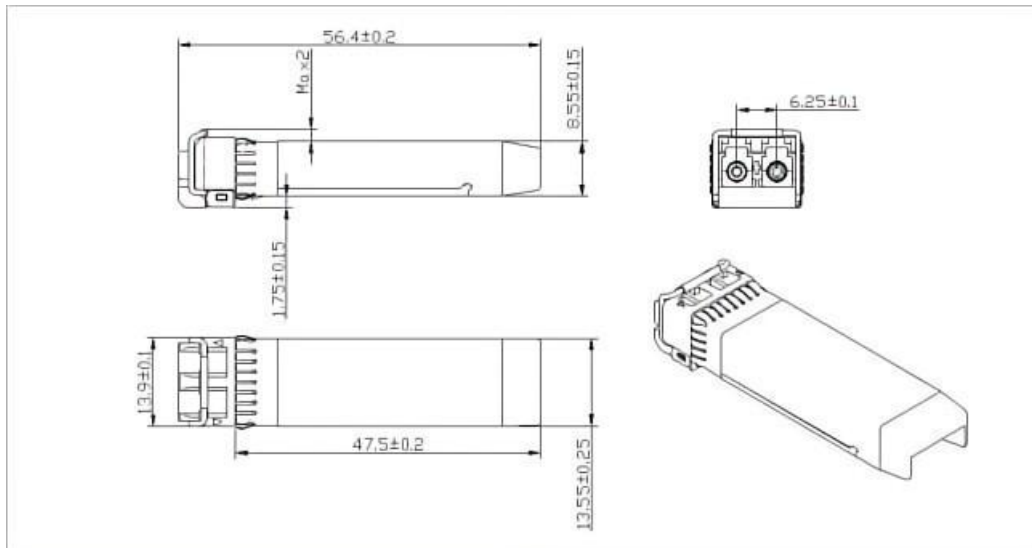

Further Information:

Web www.naddod.com

Email For order requirements: sales@naddod.com

For cooperation: agency@naddod.com

For customer service: support@naddod.com

For other informations: info@naddod.com

For technical support: tech@naddod.com

Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.

2. Nothing herein should be construed as constituting an additional warranty.

3. NADDOD assumes no responsibility for the use or reliability of equipment or software not provided by NADDOD.

Copyright © NADDOD.COM All Rights Reserved, 2022