

10GBASE-T SFP+ RJ-45 30m Copper Transceiver

Features

- Hot-pluggable SFP footprint
- Support 10GBASE-T / 5GBASE-T / 2.5GBASE-T / 1000BASE-T / 100BASE-T
- Compact RJ-45 connector assembly
- Commercial Temperature Range: 0 to 70°C
- 10 Gigabit Ethernet over Cat6a/Cat7 cable
- RoHS compliant and lead-free
- Single +3.3V power supply
- Detailed product information in EEPROM
- Physical layer IC can be accessed via 2-wire serial bus

Applications

- Ethernet over Cat6a/Cat7 cable

Compliance

- 10GBASE-T 10G Ethernet
- Compatible with IEEE Std 802.3
- ROHS

Description

10GBASE-T / 2.5GBASE-T / 1000BASE-T standards as specified in IEEE Std 802.3. 10GBASE-T SFP+ copper transceivers use the SFP's RX_LOS pin for link indication. If pull up SFP's TX_DISABLE pin, PHY GBASE-T SFP+ copper transceivers are based on the SFP Multi- Source Agreement (MSA). They are compatible with the 10GBASE-T / IC will be reset.

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	Ts	-40	+85	°C
Operating Temperature	Ts	0	+70	°C
Operating Relative Humidity	RH	0	+70	°C

Transmission Distances Ratings

Standard	Cable	Reach	Host Port
10GBASE-T	Cat6a/Cat7	30m	XFI
5GBASE-T/2.5GBASE-T	Cat5e	50m	5GBASE-R/2.5GBASE-X
1000BASE-T	Cat5e	100m	1000BASE-FX

Electrical Characteristic

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Supply Current	Is		700	900	mA	2
Input Voltage	Vcc	3.13	3.3	3.47	V	
Maximum Voltage	Vmax			4	V	
Surge Current	Isurge		TBD		mA	
Low-Speed Signals, Electronic Characteristics						
SFP Output LOW	VOL	0		0.5	V	1
SFP Output HIGH	VOH	host_Vcc - 0.5		host_Vcc + 0.3	V	1
SFP Input LOW	VIL	0		0.8	V	1
SFP Input HIGH	VIH	2		Vcc + 0.3	V	1
High-Speed Electrical Interface, Transmission Line-SFP						
Line Frequency	fL		125		MHz	

Tx Output impedance	Zout,TX		100		Ohm
Rx Input Impedance	Zin,RX		100		Ohm
High-Speed Electrical Interface, Host-SFP					
Single ended data input swing	Vin	250		1200	mV
Single ended data output swing	Vout	350		800	mV
Rise/Fall Time	Tr,Tf		175		psec
Tx Input Impedance	Zin		50		Ohm
Rx Output Impedance	Zout		50		Ohm

Notes:

- [1].4.7k to 10k pull-up tohost_Vcc,measured at host side of connector;
- [2].3.0W max power over full range of voltage and temperature. See caution note below

Pin Description

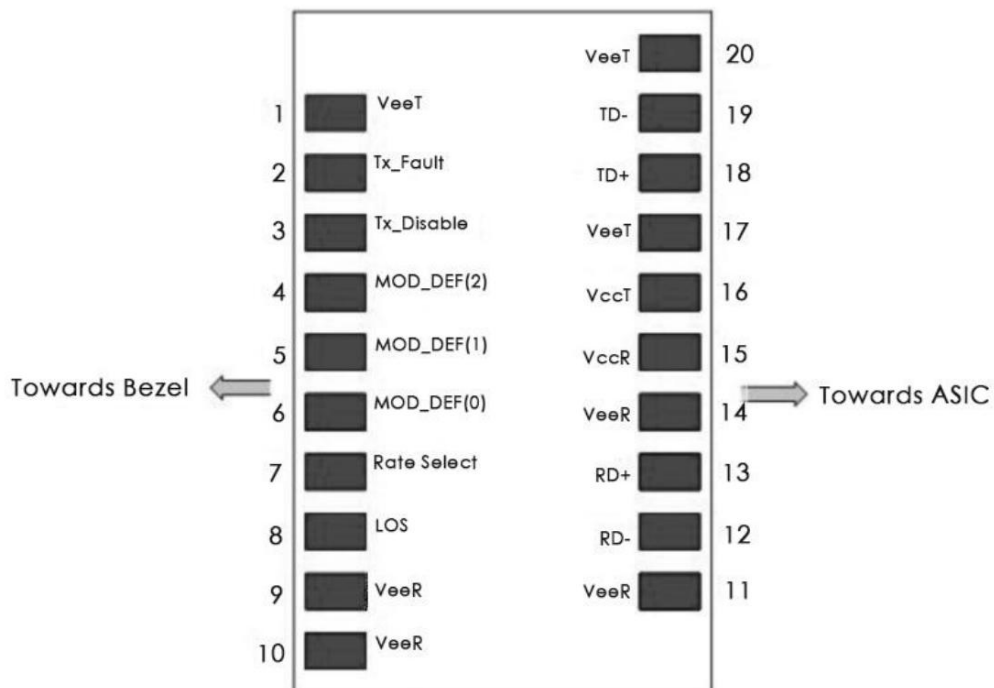


Figure1 Pin view

SFP+ Module PIN Definition

Pin	Symbol	Name / Description	Power Sequence Order	Note
1	VeeT	Transmitter Ground(Common with Receiver Ground)	1st	1
2	TX_Fault	Module Transmitter Fault	3rd	
3	TX_Dis	Transmitter Disable. Laser output disabled on high or open	3rd	2
4	MOD-DEF2	Module Definition 2. Data line for Serial ID.	3rd	3
5	MOD-DEF1	Module Definition 1. Clock line for Serial ID	3rd	3
6	MOD-DEF0	Module Definition 0. Grounded within the module.	3rd	3
7	Rate Select	Not used	3rd	
8	RX_LOS	High indicates no linked. low indicates linked	3rd	4
9	VeeR	Receiver Ground	3rd	1
10	VeeR	Module Receiver Ground	1st	1
11	VeeR	Module Receiver Ground	1st	1
12	RD-	Receiver Inverted DATA out. AC Coupled.	3rd	
13	RD+	Receiver Non-inverted DATA out. AC Coupled.	3rd	
14	VeeR	Module Receiver Ground	1st	
15	VccR	Module Receiver 3.3 V Supply	2nd	
16	VccT	Module Receiver 3.3 V Supply	2nd	
17	VeeT	Module Transmitter Ground	1st	
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	3rd	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	3rd	
20	VeeT	Module Transmitter Ground	1st	

Notes:

- [1] Circuit ground is connected to chassis ground.
- [2] PHY disabled on TDIS >2.0V or open, enabled on TDIS <0.8V
- [3] Should be pulled up with 4.7k - 10k Ohms on host board to a voltage between 2.0 V and 3.6 V. MOD_DEF(0) pulls line low to indicate module is plugged in
- [4] LVTTTL compatible with a maximum voltage of 2.5V.

Monitoring Specification

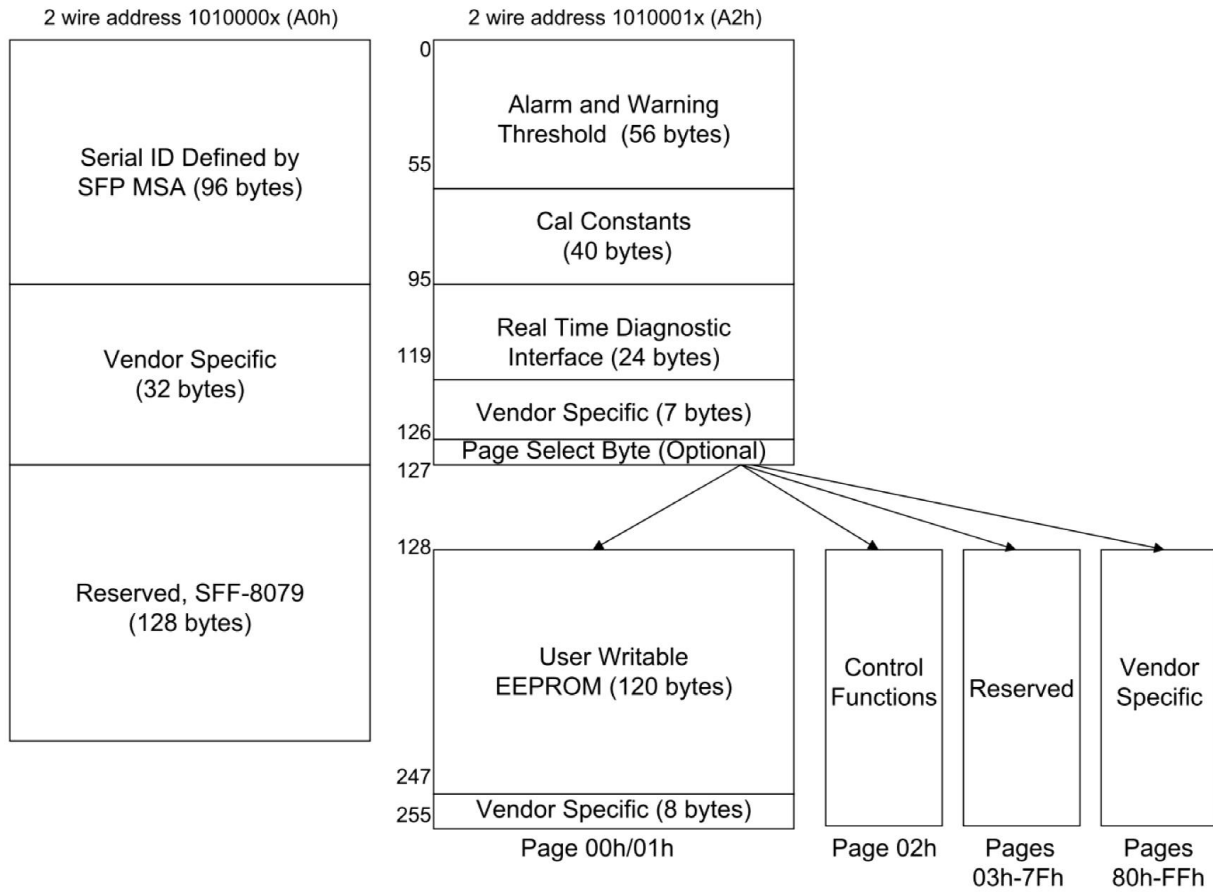


Figure2 Memory map

Further Information:

Web www.naddod.com

Email For order requirements: sales@naddod.com

For cooperation: agency@naddod.com

For customer service: support@naddod.com

For other informations: info@naddod.com

For technical support: tech@naddod.com

Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. NADDOD assumes no responsibility for the use or reliability of equipment or software not provided by NADDOD.

Copyright © NADDOD.COM All Rights