

56Gb/s QSFP+ Active Optical Cable

Features

- Support Ethernet and Fibre Channel application
- Compliant to QSFP+ Electrical MSA SFF-8436
- Multi rate of up to 14.025Gbps
- +3.3V single power supply
- Low power consumption
- 0 to 70°C case temperature operating range
- RoHS-6 compliant (lead-free)
- Metal enclosure for low EMI
- Distance 1m/2m/3m/5m/7m/10m/15m/20m/30m/50m/100m/150m

Applications

- 16G Fibre Channel at 14Gb per lane
- Super Computer
- Other optical links

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Supply Voltage	V _{CC3}	-0.5	-	+3.6	V	
Storage Temperature	T _S	- 5	-	+75	°C	
Operating Humidity	RH	+5	-	+85	%	1

Note:

[1] No condensation

Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Case Temperature	T _C	0	-	+70	°C	
Power Supply Voltage	V _{CC}	3.135	3.3	3.465	V	
Power Dissipation	P _d	-	-	1.5	W	1
Bit Rate	BR	1.25	14.025	-	Gbps	

Note:

[1] Per terminal

Characteristics

Parameter	Symbol	Unit	Min.	Typical	Max.	Note
Transmitter						
Differential Data Input Swing	V _{out}	mV	200		1000	
Input Differential Impedance	Z _D	Ω	90	100	110	
Module Select	V _{OL}	V	VEE-0.3		0.4	
Module Unselect	V _{IL}	V	2.0		V _{CC} +0.3	
Low Power Mode	V _{IH}	V	VEE-0.3		0.8	
Normal Operation	V _{IL}	V	2.0	-	V _{CC} +0.3	
Reset	V _{IL}		VEE-0.3		0.8	
Normal Operation	V _{IH}		2.0		V _{CC} +0.3	
Receiver						
Differential Data Output Swing	V _{in,P-P}	mV _{PP}	200		1000	
Output Differential Impedance	Z _D	Ω	90	100	110	
ModPrsL	V _{OL}	V	VEE-0.3	-	0.4	
Interrupt	V _{OL}	V	VEE-0.3	-	0.4	

Normal Operation	VoH	V	2.0	-	VCC+0.3	
Bit Error Rate	BER				E-12	1

Note: PRBS2^31-1@14.025Gbps

Recommended Interface

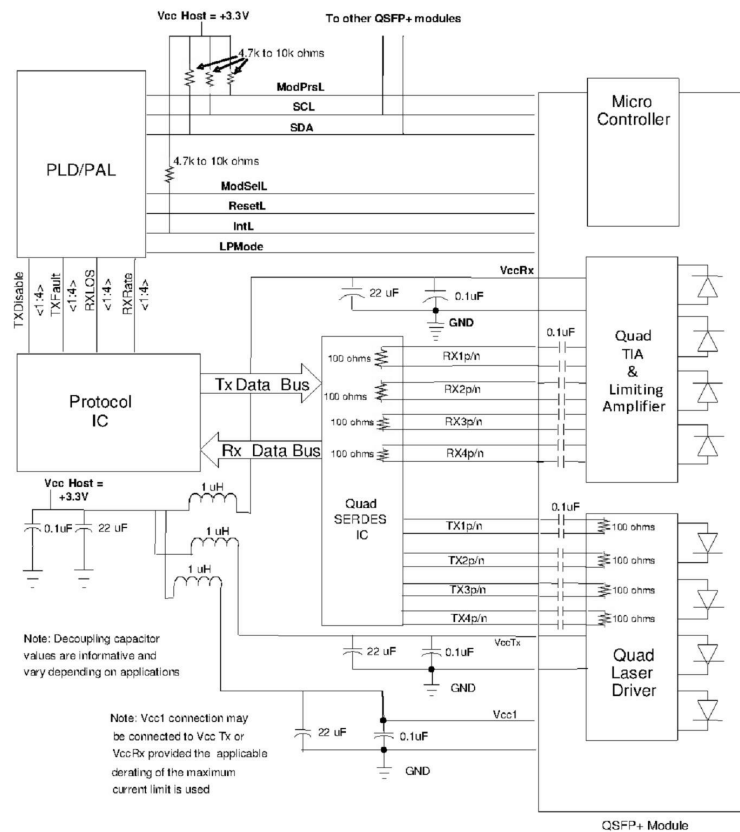


Figure 1 Recommended Interface Circuit

Pin arrangement

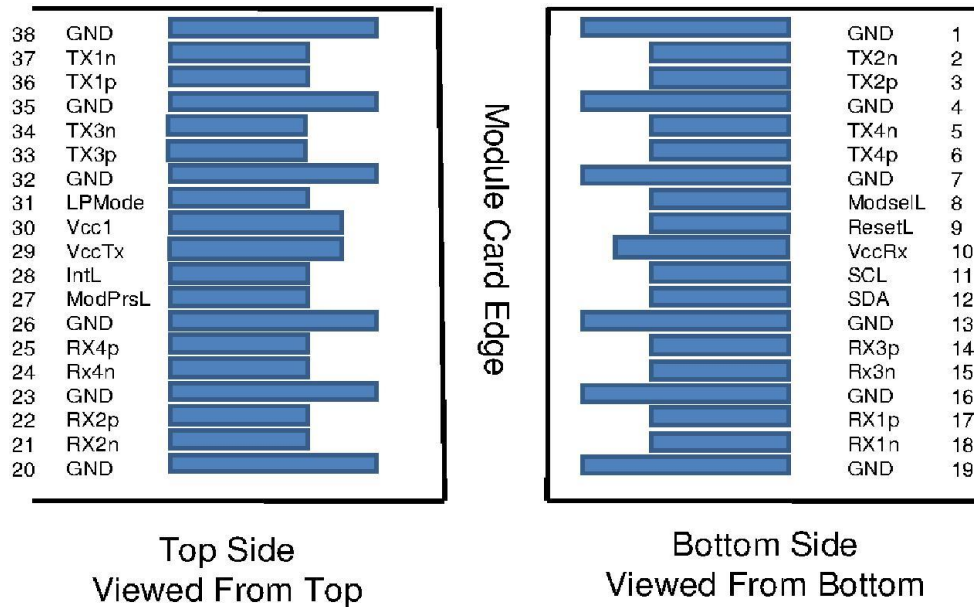


Figure 2 Pin View

Pin Descriptions

Pin	Symbol	Description	Notes
1	GND	Ground	1
2	Tx2n	Transmitter Inverted Data Input	
3	Tx2p	Transmitter Non-Inverted Data Input	
4	GND	Ground	1
5	Tx4n	Transmitter Inverted Data Input	
6	Tx4p	Transmitter Non-Inverted Data Input	
7	GND	Ground	1
8	ModSelL	Module Select	
9	ResetL	Module Reset	
10	Vcc Rx	+3.3V Power Supply Receiver	
11	SCL	2-wire serial interface clock	
12	SDA	2-wire serial interface data	
13	GND	Ground	1
14	Rx3p	Receiver Non-Inverted Data Output	

15	Rx3n	Receiver Inverted Data Output	
16	GND	Ground	
17	Rx1p	Receiver Non-Inverted Data Output	
18	Rx1n	Receiver Inverted Data Output	
19	GND	Ground	1
20	GND	Ground	1
21	Rx2n	Receiver Inverted Data Output	
22	Rx2p	Receiver Non-Inverted Data Output	
23	GND	Ground	1
24	Rx4n	Receiver Inverted Data Output	
25	Rx4p	Receiver Non-Inverted Data Output	
26	GND	Ground	1
27	ModPrsL	Module Present	
28	IntL	Interrupt	
29	Vcc Tx	+3.3V Power supply transmitter	
30	Vcc1	+3.3V Power supply	
31	LPMode	Low Power Mode	
32	GND	Ground	1
33	Tx3p	Transmitter Non-Inverted Data Input	
34	Tx3n	Transmitter Inverted Data Input	
35	GND	Ground	1
36	Tx1p	Transmitter Non-Inverted Data Input	
37	Tx1n	Transmitter Inverted Data Input	
38	GND	Ground	1

Monitoring Specification

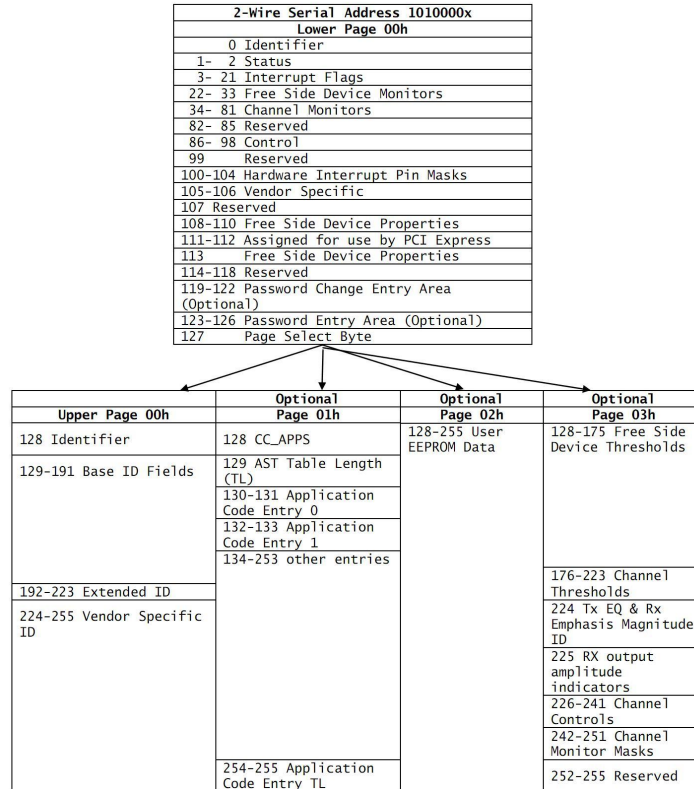


Figure 3 Monitoring Specification

Mechanical

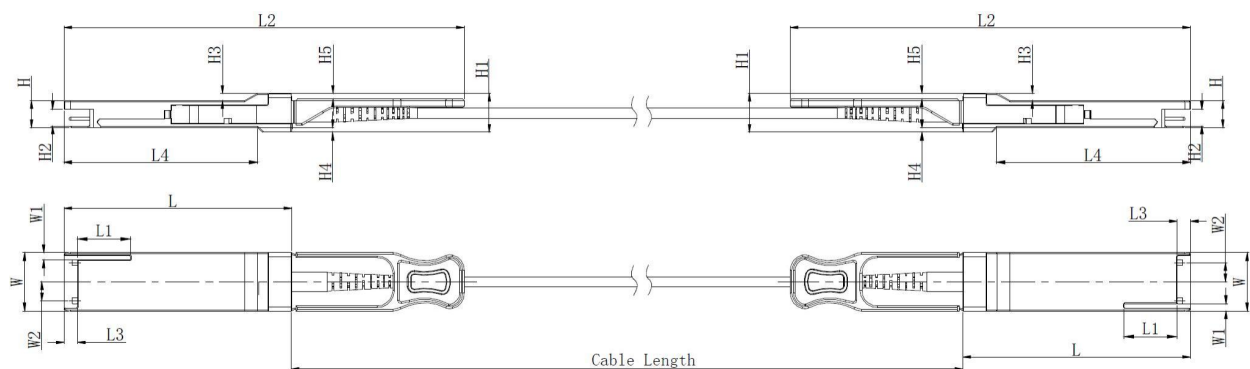


Figure 4 Mechanical Diagram

Unit mm

	L	L1	L2	L3	L4	W	W1	W2	H	H1	H2	H3	H4	H5
Max	72.2	-	128	4.35	61.4	18.45	-	6.2	8.6	12.4	5.35	2.5	1.6	2.0
Type	72.0	-	-	4.2	61.2	18.35	-	-	8.5	12.2	5.2	2.3	1.5	1.8
Min	68.8	16.5	124	4.05	61.0	18.25	2.2	5.8	8.4	12.0	5.05	2.1	1.3	1.6

Cable Length

Parameter	Value	Units
Diameter	3	mm
Minimum bend radius	30	mm
Length tolerance	Length < 1 m:	+5 / -0
	1 m ≤ length ≤ 4.5 m:	+15 / -0
	5 m ≤ length ≤ 14.5 m:	+30 / -0
	Length ≥ 15.0 m	+2% / -0
Cable color	Orange(OM2),Aqua(OM3),Magenta(OM4)	

Warnings

Handling Precautions: This device is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety: Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Further Information:

Web www.naddod.com

Email For order requirements: sales@naddod.com

For cooperation: agency@naddod.com

For customer service: support@naddod.com

For other informations: info@naddod.com

For technical support: tech@naddod.com

Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. NADDOD assumes no responsibility for the use or reliability of equipment or software not provided by NADDOD.

Copyright © NADDOD.COM All Rights