

# 800G Twin-port OSFP 2x400Gb/s Multimode 2xSR4 100m Transceiver

## Features

- 800G 2xSR4 multimode transceiver
- 8-channels of 100G-PAM4 electrical modulation
- Two ports of 4-channel 100G-PAM4 optical modulation
- Supports two straight 400Gb/s or two 1:2 splitter fiber cables for 200Gb/s
- Finned-top OSFP for air-cooled switches
- 850nm VCSEL
- Maximum reach: 100m using OM4 fiber
- Two MPO-12/APC optical connectors
- 14 Watts max power
- Single 3.3V power supply
- Class 1 laser safety
- Hot pluggable, RoHS compliant
- CMIS 4.0 compliant
- Case temperature range 0°C to +70°C

## Description

OSFP-800G-2xSR4 is an Eight-Channel, Parallel, Pluggable, Fiber-Optic OSFP for 800Gigabit Ethernet applications. This transceiver is a high performance module for shortrange data communication and interconnect application. It integrates eight data lanes in each direction with 8x53.125GBd. The length of OSFP SR8 is up to 70 meters over OM3 MMF or 100 meters over OM4 MMF. This module is designed to operate over multimode fiber systems using a nominal wavelength of 850nm.

The transceiver combinations guarantee optimal operation. Rigorous production testing ensures the best out-of-the-box installation experience, performance, and durability.

## Absolute Maximum Specifications

Absolute maximum ratings are those beyond which damage to the device may occur.

Prolonged operation between the operational specifications and absolute maximum ratings is not intended and may cause permanent device degradation.

Table1-Absolute Maximum Specifications					
Parameter	Min.	Typical	Max.	Unit	Note
Storage Temperature	-40		+85	°C	
Supply voltage	-0.5		3.6	V	
Relative Humidity (non- condensing)	15		85	%	
Control input voltage	-0.3		Vcc+0.5	V	
Operating Case Temperature	0		70	°C	
Receiver Damage Threshold, per Lane	5			dBm	

## Recommended Operating Conditions

Table2-Recommended Operating Conditions						
Parameter	Symbol	Min	Typical	Max.	Units	Notes
Operating Case Temperature	TOP	0		70	degC	
Relative Humidity(non-condensing)	RH	15		85	%	
Power Supply Voltage	Vcc	3.135		3.465	V	
Total Power Consumption	Pc			14	W	1
Supply Current per end				5.1	A	
Bit Rate	BR			850	Gbps	
Fiber Length on OM3 MMF				70	m	
Fiber Length on OM4 MMF				100	m	
I <sup>2</sup> C Clock Frequency		0		1000	kHz	

### Notes:

[1] Under condition of 3.465V operating supply voltage, and 70°C case temperature.

## Electrical Specifications

Table3-Electrical Specifications						
Parameter	Test Point	Min.	Typical	Max.	Unit	Note
Pre FEC Bit Error Ratio				2.4E-4		
Post FEC Bit Error Ratio	Icc			1E-12		
Transmitter (each Lane)						
Differential pk-pk Input Voltage tolerance		750			mV	
Differential Termination Mismatch				10	%	
Eye height		10			mV	
Common-mode to differential-mode return loss		IEEE802.3ck Equation (120G-1)			dB	
Vertical eye closure				12	dB	
Effective return loss		7.3			dB	
Transition Time		10			ps	
Receiver(each Lane)						
Differential data output swing		300		900	mVpp	
Differential termination mismatch				10	%	
Eye height		15			mV	
Vertical eye closure				12	dB	
Common-mode to differential-mode return loss		IEEE802.3ck Equation (120G-1)				
Effective return loss		8.5			dB	
Transition time		8.5			ps	

### Notes:

[1] Under condition of 3.465V operating supply voltage, and 70°C case temperature.

## Optical Specifications

Table4-Optical Specifications						
Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transceiver						
Data rate per lane	DR		53.125		GBd	
Modulation format			PAM4			
Center Wavelength	$\lambda$	840	860	868	nm	1
RMS spectral width	$\sigma$			0.6	nm	
Average Launch power, each lane	$P_{avg}$	-1		4	dBm	
Optical Power OMA, each Lane, max	$P_{OMA}$	3.5			dBm	
OMA <sub>outer</sub> , max (TECQ, TDECQ)<1.8 dB each lane		max [-2.6 , max(TECQ,TECQ) - 4.4]			dBm	
min 1.8<max (TECQ, TDECQ)<4.4 dB						
Transmitter and dispersion eye closure	TDECQ			4.4	dB	

(TDECQ), each lane						
Transmitter eye closure for PAM4 (TECQ), each lane		TECQ			4.4	dB
Extinction ratio		ER	2.5			dB
Transmitter power excursion, each lane					2.3	dBm
Optical Return Loss Tolerance		ORLT			14	dB
Optical Power for TX DISABLE					-30	dBm
Encircled fluxb			≥86% at 19 um ≤30% at 4.5 um			2
Receiver						
Data rate per lane		BR		53.125		Gbd
Modulation format			PAM4			
Center Wavelength		λ	842	850	863	nm
Damage threshold			5			dBm
Average receive power, each lane			-6.4		4	dBm
Receive power, each lane (OMAouter)					3.5	dBm
Receiver reflectance		Rr			-15	dB
Receiver sensitivity, each lane			RS = max [-4.6 , TECQ – 6.4]			dBm
Stressed receiver sensitivity, each lane					-2	dBm
Rx LOS	Assert		-15			dBm
	De-assert				-7.5	dBm
	Hysteresis		0.5		5	dB

#### Notes:

[1] Defined according to the performance of the laser used.

[2] Measured into type A1a.2 or type A1a.3, or A1a.4, 50  $\mu\text{s}$  fiber, in accordance with IEC 61280-1-4.

[3] Receiver sensitivity is informative and is defined for a transmitter with a value of TECQ. Measured with conformance test signal at TP3 for BER = 2.4E-4 Pre-FEC.

## Pin Description

The device is OSFP MSA Specification for OSFP Octal Small Form Factor Pluggable Module Rev. 1.12 compliant, see [www.osfpmsa.org](http://www.osfpmsa.org).

Table5-Pin Description					
Pin	Symbol	Description	Pin	Symbol	Description
1	GND	Ground	31	GND	Ground
2	Tx2p	Transmitter Non-Inverted Data Input	32	Rx2p	Receiver Non-Inverted Data Output
3	Tx2n	Transmitter Inverted Data Input	33	Rx2n	Receiver Inverted Data Output
4	GND	Ground	34	GND	Grounds
5	Tx4p	Transmitter Non-Inverted Data Input	35	Rx4p	Receiver Non-Inverted Data Output
6	Tx4n	Transmitter Inverted Data Input	36	Rx4n	Receiver Inverted Data Output
7	GND	Ground	37	GND	Ground

8	Tx6p	Transmitter Non-Inverted Data Input	38	Rx6p	Receiver Non-Inverted Data Output
9	Tx6n	Transmitter Inverted Data Input	39	Rx6n	Receiver Inverted Data Output
10	GND	Ground	40	GND	Ground
11	Tx8p	Transmitter Non- Inverted Data input	41	Rx8p	Receiver Non-Inverted Data Output
12	Tx8n	Transmitter Inverted Data Input	42	Rx8n	Receiver Inverted Data Output
13	GND	Ground	43	GND	Ground
14	SCL	2-wire serial interface clock	44	INT / RSTn	Module Interrupt / Module Reset
15	VCC	+3.3V Power	45	VCC	+3.3V Power
16	VCC	+3.3V Power	46	VCC	+3.3V Power
17	LPWn / PRSn	Low- Power Mode / Module Present	47	SDA	2-wire Serial interface data
18	GND	Ground	48	GND	Ground
19	Rx7n	Receiver Inverted Data Output	49	Tx7n	Transmitter Inverted Data Input
20	Rx7p	Receiver Non-Inverted Data Output	50	Tx7p	Transmitter Non-Inverted Data Input
21	GND	Ground	51	GND	Ground
22	Rx5n	Receiver Inverted Data Output	52	Tx5n	Transmitter Inverted Data Input
23	Rx5p	Receiver Non-Inverted Data Output	53	Tx5p	Transmitter Non-Inverted Data Input
24	GND	Ground	54	GND	Ground
25	Rx3n	Receiver Inverted Data Output	55	Tx3n	Transmitter Inverted Data Input
26	Rx3p	Receiver Non-Inverted Data Output	56	Tx3p	Transmitter Non-Inverted Data Input
27	GND	Ground	57	GND	Ground
28	Rx1n	Receiver Inverted Data Output	58	Tx1n	Transmitter Inverted Data Input
29	Rx1p	Receiver Non-Inverted Data Output	59	Tx1p	Transmitter Non-Inverted Data Input
30	GND	Ground	60	GND	Ground

## OSFP Module Pad Layout

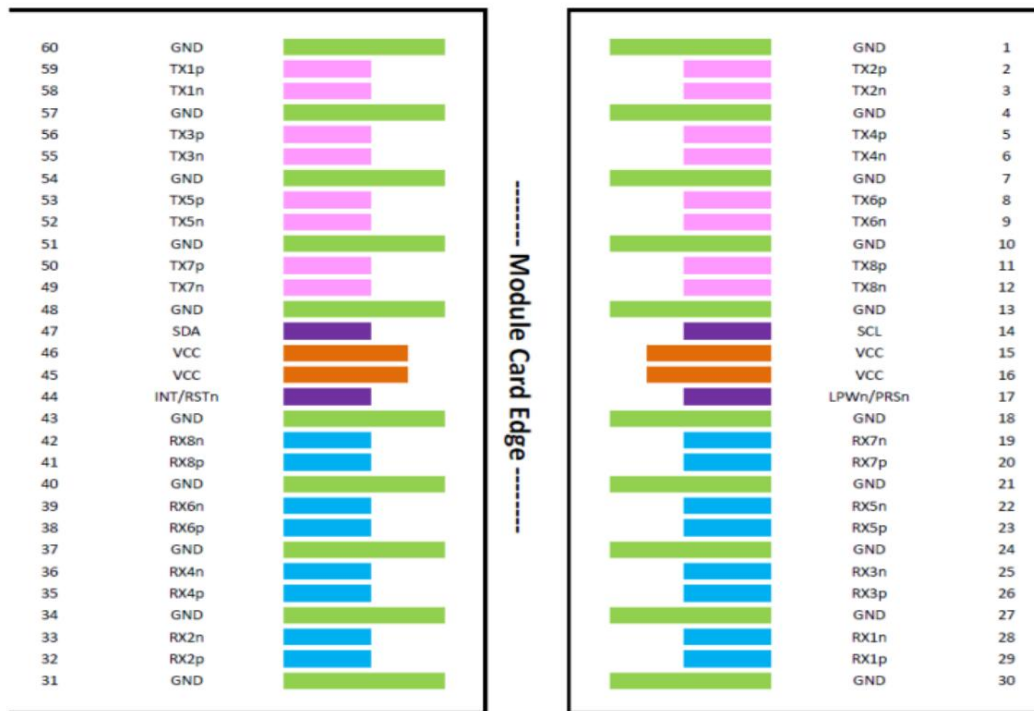


Figure 1 MSA Compliant Connector

## Transceiver Block Diagram

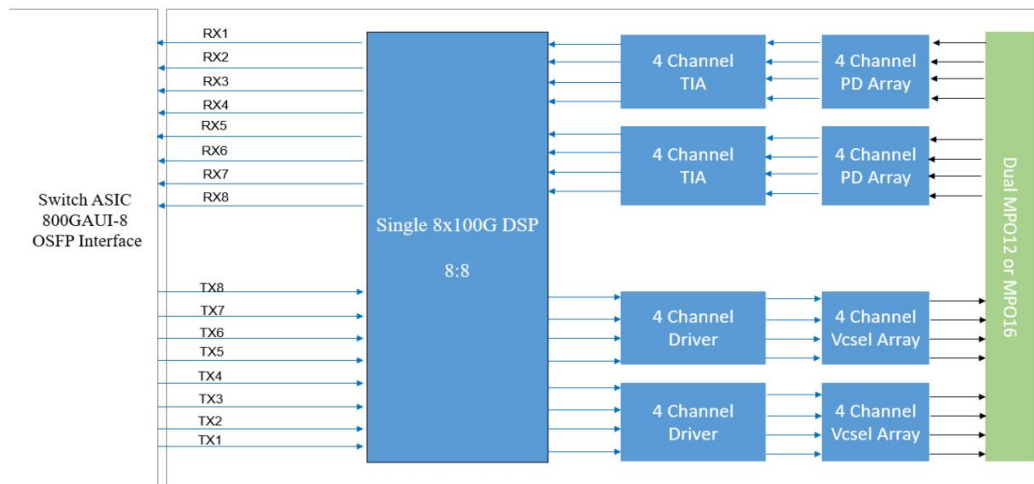


Figure 2 Transceiver Block Diagram

## Management Interface

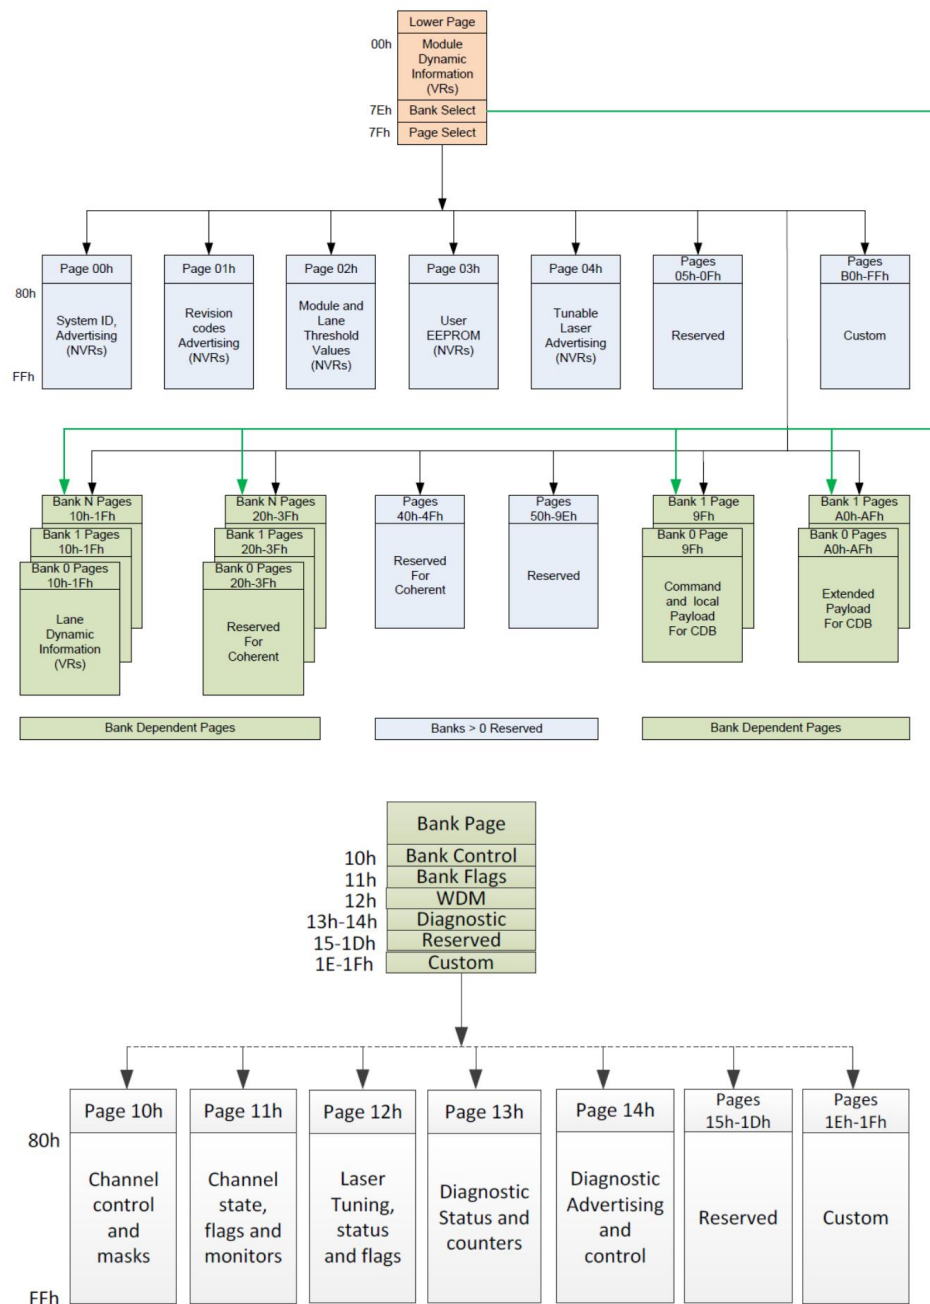


Figure 3 CMIS Module Memory Map

## Optical Port Description

The optical interface port is dual MPO-12 APC receptacle. The transmit and receive optical lanes shall occupy the positions depicted in Figure 4 when looking into the MDI receptacle with the connector keyway feature on top.

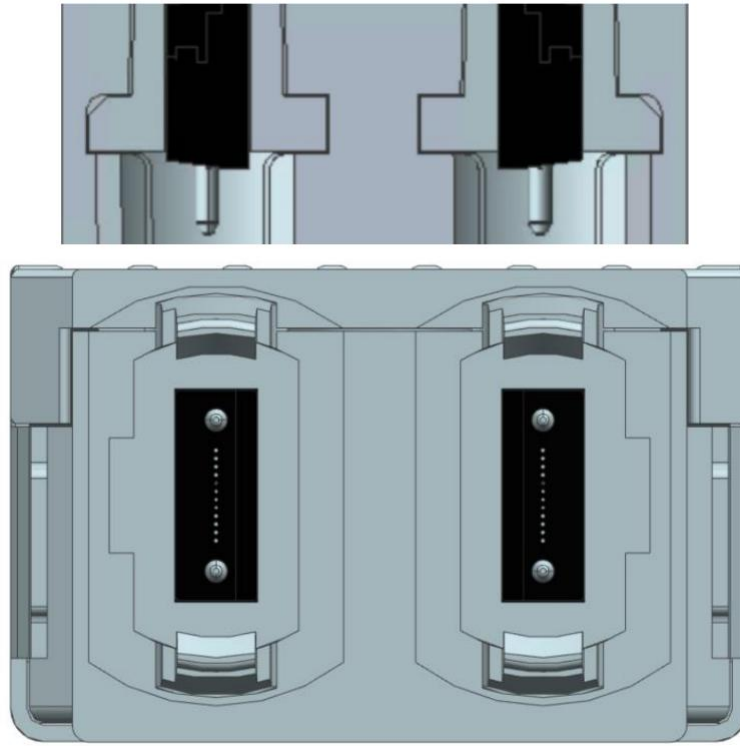


Figure 4 Optical Media Dependent Interface port assignments

## Mechanical Drawing

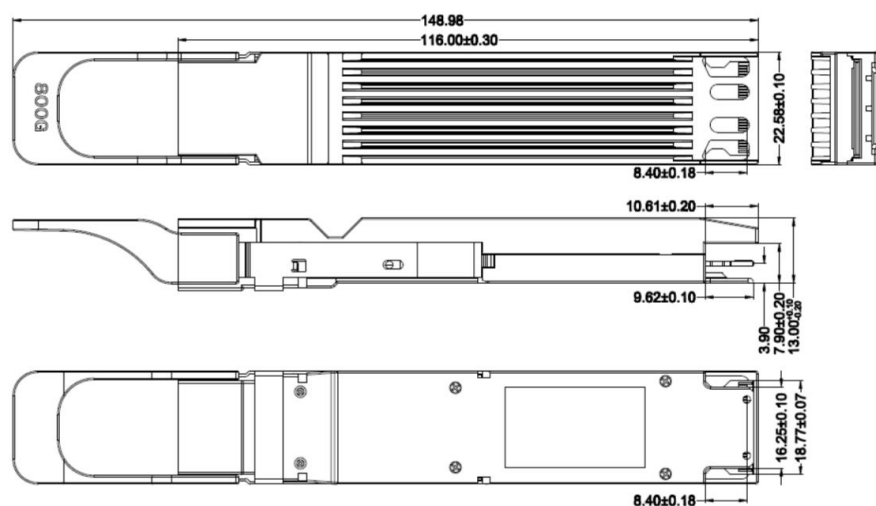


Figure 5 Mechanical Outline



## Module appearance



Figure 6 Module appearance

## Notice

This document is provided for information purposes only and shall not be regarded as a warranty of a certain functionality, condition, or quality of a product. Neither NADDOD make any representations or warranties, expressed or implied, as to the accuracy or completeness of the information contained in this document and assumes no responsibility for any errors contained herein. NADDOD shall have no liability for the consequences or use of such information or for any infringement of patents or other rights of third parties that may result from its use. This document is not a commitment to develop, release, or deliver any material (defined below), code, or functionality.

NADDOD reserves the right to make corrections, modifications, enhancements, improvements, and any other changes to this document, at any time without notice. Customer should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

NADDOD makes no representation or warranty that products based on this document will be suitable for any specified use. Testing of all parameters of each product is not necessarily performed by NADDOD. It is customer's sole responsibility to evaluate and determine the applicability of any information contained in this document, ensure the product is suitable and fit for the application planned by customer, and perform the necessary testing for the application in order to avoid a default of the application or the product.

NADDOD products are sold subject to the NADDOD standard terms and conditions of sale supplied at the time of order acknowledgement, unless otherwise agreed in an individual sales agreement signed by authorized representatives of NADDOD and customer ("Terms of Sale"). NADDOD hereby expressly objects to applying any customer general terms and conditions with regards to the purchase of the NADDOD product referenced in this document. No contractual obligations are formed either directly or indirectly by this document.

## Further Information:

---

Web [www.naddod.com](http://www.naddod.com)

Email For order requirements: [sales@naddod.com](mailto:sales@naddod.com)  
For customer service: [support@naddod.com](mailto:support@naddod.com)  
For technical support: [tech@naddod.com](mailto:tech@naddod.com)

For cooperation: [agency@naddod.com](mailto:agency@naddod.com)

For other information: [info@naddod.com](mailto:info@naddod.com)

## Disclaimer

---

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. NADDOD assumes no responsibility for the use or reliability of equipment or software not provided by NADDOD.

Copyright © NADDOD.COM All Rights