

# 40Gb/s QSFP+ PLR4 1310nm 10km Optical Transceiver

## Features

- Hot-pluggable QSFP+ form factor
- Supports 4 independent streams of 10G Ethernet or OTN data
- Power dissipation  $\leq 2.5W$
- RoHS-6 compliant
- Commercial case temperature range 0°C to 70°C
- Single 3.3V power supply
- Maximum link length of 10km on Single Mode Fiber (SMF)
- XLPPI electrical interface
- MP012 receptacle
- Built-in digital diagnostic functions, including Tx/Rx power monitoring

## Applications

- 40G Ethernet
- OTU2, OTU1e, OTU2e

## Description

QSFP+ transceiver modules are designed for use in high density 40 Gigabit Ethernet links over single mode fiber. They are compliant with the QSFP+ MSA, IEEE 802.3ae 10GBASE-LR/LW, and OTN data rates OTU2, OTU1e, and OTU2e per the ITU. Digital diagnostics functions are available via an I<sup>2</sup>C interface, as specified by the QSFP+ MSA. The transceiver is RoHS compliant per Directive 2011/65/EU5.

## General Specifications

Parameter	Value	Unit	Notes
Module Form Factor	QSFP+		
Maximum Aggregate Data Rate	44.4	Gb/s	
Maximum Data Rate per Lane	11.095	Gb/s	Maximum Data Rate per Lane
Protocols Supported	10G Ethernet		This module is not re-timed
Electrical Interface and Pin-out	38-pin edge connector		Pin-out as defined by the QSFP+MSA
Maximum Power Consumption	2.5	Watts	
Management Interface	Serial, I2C-based, 400 kHz maximum frequency		As defined by the QSFP+ MSA

Data Rate Specifications	Symbols	Min.	Typ	Max.	Unit	Notes
Bit Rate per Lane	BR	9.95		11.10	Mb/sec	1
Bit Error Ratio	BER			10- 12		2
Link distance on SMF	d			10	kilometers	

Notes:

1. Compliant with 10GBASE-LR/LW, OTU2, OTU1e, and OTU2e and XLPPI.
2. Tested with a PRBS 2- 1 test pattern.

## Recommended Operating Conditions

Parameter	Symbols	Min.	Typical	Max.	Unit	Notes
Maximum Supply Voltage	Vcc1, VccTx, VccRx	-0.5		3.6	V	
Storage Temperature	Ts	-40		85	°C	
Case Operating Temperature	Top	0		70	°C	
Relative Humidity	RH	0		85	%	1
Damage Threshold, per Lane	DT	3.4			dBm	

Notes:

1. Non-condensing.

## Electrical Characteristic (TOP= 0 to 70 °C, VCC = 3.15 to 3.45 Volts)

**Table3-Electrical Characteristic**

Parameter	Symbol	Min.	Typ	Max.	Unit	Notes
Supply Voltage	Vcc1, VccTx, VccRx	3.1		3.47	V	
Supply Current	Icc			1.13	A	
Transmit turn-on time				2000	ms	1
<b>Transmitter(per Lane)</b>						
Single ended input voltage tolerance	VinT	-0.3		4.0	V	
Differential data input swing	Vin,pp	120		1200	mVpp	2
Differential input threshold			50		mV	
AC common mode input voltage tolerance (RMS)		15			mV	
Differential input return loss		Per IEEE P802.3ba,Section 86A.4. 1. 1			dB	3
J2 Jitter Tolerance	Jt2	0.17			UI	
J9 Jitter Tolerance	Jt9	0.29			UI	
Data Dependent Pulse Width Shrinkage	DDPWS	0.07			UI	
Eye mask coordinates{X1, X2 ,Y1, Y2}			0.11, 0.31 95, 350		UI mV	4
<b>Receiver(per Lane)</b>						
Single Ended Output Voltage Tolerance		0.3			4	V
Differential data output swing	Vout,pp	200		400	mVpp	5,6
		300		600		
		400		800		
		600		1200		
AC common mode output voltage (RMS)				7.5	mV	
Termination mismatch at 1 MHz				5	%	
Differential output return loss		Per IEEE P802.3ba,Section 86A.4.2. 1			dB	3
Common mode output return loss		Per IEEE P802.3ba,Section 86A.4.2.2			dB	3
Output transition time, 20% to 80%		28			ps	
J2 Jitter output	Jo2			0.42	UI	
J9 Jitter output	Jo9			0.65	UI	
Eye mask coordinates #1 {X1, X2, Y1, Y2}			0.29, 0.5	150, 425	UI mV	4
Power Supply Ripple Tolerance	PSR	50			mVpp	

Notes:

1. From power-on and end of any fault conditions.
2. After internal AC coupling. Self-biasing 100Ω differential input.
3. 10 MHz to 11.1 GHz range
4. Hit ratio =  $5 \times 10E^{-5}$ .
5. AC coupled with 100Ω differential output impedance.
6. Output voltage settable in four discrete ranges via I<sup>2</sup>C command.


## Optical Characteristic (TOP= 0 to 70°C, VCC = 3.15 to 3.47 Volts)

Table4-Optical Characteristics						
Parameter	Symbols	Min.	Typical	Max.	Unit	Notes
<b>Transmitter</b>						
Signaling Speed per Lane		9.95		10.095	GBd	1
Lane center wavelength	$\lambda$	1290		1330		
Average Optical Power per channel	TXPx	-6.0		- 1.0	dBm	2
Transmit OMA per Lane	TxOMA	-5.2		3.0	dBm	
Transmitter and Dispersion Penalty	TDP			3.2	dB	
Transmit OMA per lane minus TDP		-6.2			m	
Optical Extinction Ratio	ER	6.0			dB	
Side mode Suppression ratio	SSRmin	30			dB	
Average launch power of OFF transmitter, per lane				-30	dBm	
Relative Intensity Noise	RIN			- 128	dB/Hz	3
Tx Jitter	Txj			-20	dB	
Transmitter Reflectance				- 12		
Transmitter eye mask definition		Per 802.3ae, G.693, and G.691				
<b>Receiver</b>						
Signaling Speed per Lane		9.95		10.095	GBd	4
Lane center wavelength	$\lambda$	1260		1355		
Damage Threshold per Lane	PMAX			1.5	dBm	
Average Receive Power per Lane	RxPx	- 14.4		0.5	dBm	5
Receiver Sensitivity (OMA) per Lane	Rxsens			- 12.6	dBm	
Stressed Receiver Sensitivity (OMA) per Lane	SRS			- 10.3	dBm	
Return Loss	RL			- 14	dBm	
Receive electrical 3 dB upper cutoff frequency, per lane				12.3	GHz	
LOS De-Assert	LOSD			- 14	dBm	
LOS Assert	LOSA	-30		- 17	dBm	
LOS Hysteresis			0.5		dB	

Notes:

1. Transmitter consists of 4 lasers operating between 9.95 and 11.10Gb/s each.
2. Minimum value is informative.
3. RIN is scaled by  $10 \cdot \log(10/4)$  to maintain SNR outside of transmitter.
4. Receiver consists of 4 photo-detectors operating between 9.95 and 11.10Gb/s each.
5. Minimum value is informative, equals min Tx OMA with infinite ER and max channel insertion loss.

## Pin Description

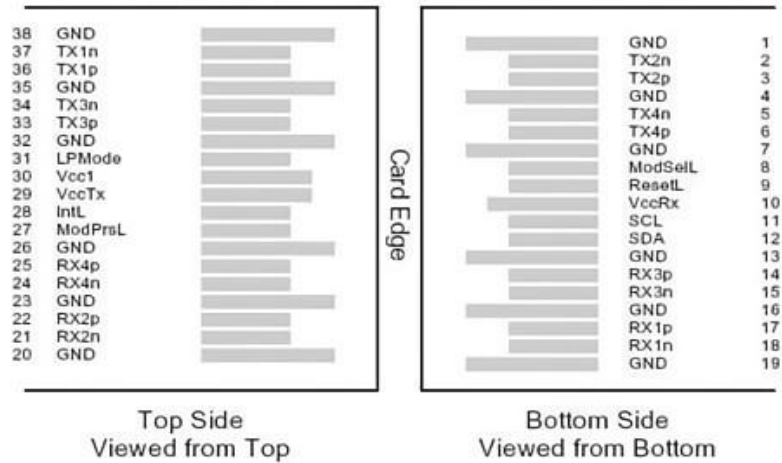

Pin	Symbols	Logic	Description	Notes
1	GND		Ground	1
2	Tx2n	CML-I	Transmitter Inverted Data Input	
3	Tx2p	CML-I	Transmitter Non-Inverted Data Input	
4	GND		Ground	1
5	Tx4n	CML-I	Transmitter Inverted Data Input	
6	Tx4p	CML-I	Transmitter Non-Inverted Data Input	
7	GND		Ground	
8	ModSelL	LVTTL-I	Module Select	
9	ResetL	LVTTL-I	Module Reset	
10	Vcc Rx		+3.3V Power Supply Receiver	2
11	SCL	LVCOMS-I/O	2-wire serial interface clock	
12	SDA	LVCOMS-I/O	2-wire serial interface data	
13	GND		Ground	
14	Rx3p	CML-O	Receiver Non-Inverted Data Output	
15	Rx3n	CML-O	Receiver Inverted Data Output	
16	GND		Ground	1
17	Rx1p	CML-O	Receiver Non-Inverted Data Output	
18	Rx1n	CML-O	Receiver Inverted Data Output	1
19	GND		Ground	1
20	GND		Ground	
21	Rx2n	CML-O	Receiver Inverted Data Output	
22	Rx2p	CML-O	Receiver Non-Inverted Data Output	
23	GND		Ground	


24	Rx4n	CML-0	Receiver Inverted Data Output	
25	Rx4p	CML-0	Receiver Non-Inverted Data Output	
26	GND		Ground	1
27	ModPrsL	LVTTL-0	Module Present	
28	IntL	LVTTL-0	Interrupt	
29	VccTx		+3.3V Power supply transmitter	2
30	Vcc1		+3.3V Power supply	2
31	LPMoDe	LVTTL-I	Low Power Mode	
32	GND		Ground	1
33	Tx3p	CML-I	Transmitter Non-Inverted Data Input	
34	Tx3n	CML-I	Transmitter Inverted Data Input	
35	GND		Ground	1
36	Tx1p	CML-I	Transmitter Non-Inverted Data Input	
37	Tx1n	CML-I	Transmitter Inverted Data Input	
38	GND		Ground	1

Notes:

1. Circuit ground is internally isolated from chassis ground.

## Mechanical Dimensions

The mechanical specifications are compliant to the QSFP+ MSA transceiver module specifications.

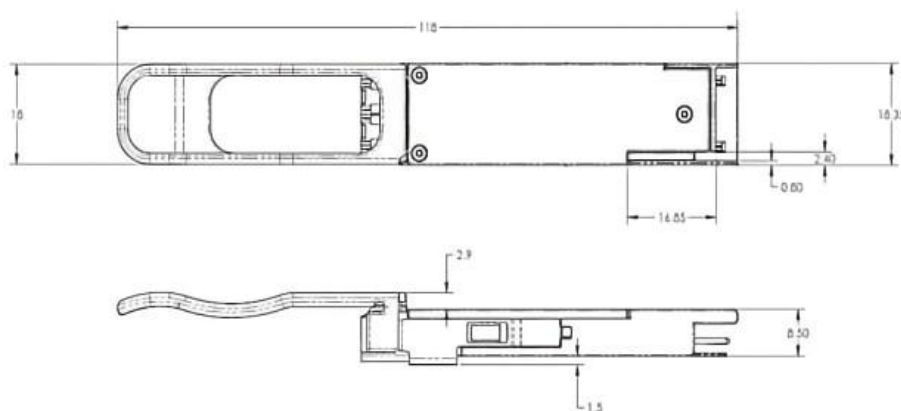

## Further Information:

---

Web [www.naddod.com](http://www.naddod.com)

Email For order requirements: [sales@naddod.com](mailto:sales@naddod.com)

For cooperation: [agency@naddod.com](mailto:agency@naddod.com)

For customer service: [support@naddod.com](mailto:support@naddod.com)

For other informations: [info@naddod.com](mailto:info@naddod.com)

For technical support: [tech@naddod.com](mailto:tech@naddod.com)

## Disclaimer

---

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. NADDOD assumes no responsibility for the use or reliability of equipment or software not provided by NADDOD.

Copyright © NADDOD.COM All Rights