

MPO-12 APC (Female) to 2 MPO-4 APC (Female) Type B LSZH Multimode Splitter Fiber Cable

Features

- Flexible round outer jacket for easy installation
- Push-pull latching for quick release
- Female-to-Female connectors
- 50/125 μ m Multimode fibers
- Telcordia GR-1435 compliant
- IEC Standard Connectors:
MPO: IEC 61754-7 and ANSI/TIA/EIA 604-5-199
- OFNR/LSZH (low smoke zero halogen) jacket
- Supports InfiniBand, Ethernet protocols

Applications

- Optical short-reach high speed links in data centers
- Data processing and storage systems

Description

The M4MPOA2x4F, is a multimode, 4-channel to two 2-channel splitter fiber cable. The Multiple Push On, 12 fiber, Angled Polished Connectors (MPO-12/APC) uses 8 active fibers to transmit light and 4 inactive fibers as strength members. The Angled Polished Connector has a 8-degree polished angle to deflect internal optical back reflections from entering the transceivers and distorting the signal quality.

The 4-channel end is inserted into a Twin port OSFP, 800Gb/s transceiver. The 2-channel ends are inserted into two, single-port 400Gb/s OSFP and/or QSFP112 transceivers which with only 2 fibers can output 200G rates. Two splitter fiber cables are used in the twin-port OSFP transceiver enabling four, 2-channel ends to four transceivers.

The fibers are "crossover", Type-B cables enable directly attaching two transceivers together and allow the transmit laser fiber on pin 1 to "crosses over" and align with pin 12 of the opposite fiber end transceiver photo detector. The typical usecase is linking OSFP switches to in ConnectX-7® network adapters and/or BlueField-3® Data Processing Units (DPUs) in compute and storage servers.

Rigorous cable production testing ensures best out-of-the-box installation experience, performance, and durability. NADDOD's optical solutions provide short, medium, and long reach scalability for all topologies, utilizing innovative optical technologies to enable high signal integrity and reliability.

Absolute Maximum Specifications

Absolute maximum ratings are those beyond which damage to the device may occur.

Prolonged operation between the operational specifications and absolute maximum ratings is not intended and may cause permanent device degradation.

Environmental Specifications

Table1-Environmental Specifications			
Parameter	Min	Max.	Units
Storage temperature	-40	85	°C
Operating temperature	0	70	°C
Humidity	10	85	%RH

Mechanical and Optical Specifications

Table2-Mechanical and Optical Specifications			
Parameter	Note	Value	Units
Tolerance on length,	Length < 5 m Length ≥ 5 m	+0.1/-0 +2% x L/-0	m
Number of Fibers		12	
Cable diameter		3 ± 0.2	mm
Minimum bending radius	Anywhere on the cable	30	mm
Cable Jacket		Magenta, LSZH-OFNR	

Fiber	Length $\leq$ 30 m	Multimode OM3	m
	Length > 30 m	Multimode OM4	m
Topology	Crossed	Type B	
Connectors and connector end face	Low loss MPO	APC, female	
Insertion Loss, connector end face, IL	L=length {m}	$\leq 0.35 + 0.0004 \times L$	dB
Return Loss, connector end face, RL		≥ 35	dB

Interconnection Scheme

The fiber which connects lane 1 from transceiver A, must end at lane 12 on transceiver B at the other end of the link. This calls for a crossed MPO cable, commonly referred to as Type B.

Table3-Interconnection Scheme			
MP01 MPO/APC Female	Connection	MP02 MPO/APC Female	MP03 MPO/APC Female
1	----->	12	-
2	----->	11	-
3	----->	-	12
4	----->	-	11
5	Not Connected	-	-
6	Not Connected	-	-
7	Not Connected	-	-
8	Not Connected	-	-
9	<-----	-	2
10	<-----	-	1
11	<-----	2	-
12	<-----	1	-

Application

The M4MPOA2x4F Fiber Cable is intended for interconnection of 2 servers sharing a port in a high-speed switch. The cable mates with pluggable optical 400GbE transceivers such as OSFP 800G 2xSR4 twin port OSFP SR8 transceiver for InfiniBand and Ethernet systems in the switch end and OSFP 400G SR4 or QSFP112 400G SR4 in ConnectX-7 network adapters and BlueField-3 DPUs.

- Twin port OSFP transceivers must use the same fiber type in both MPO-12/APC ports (straight or 1:2 splitter) and cannot be mixed.
- Multimode fibers use an industry standard Magenta fiber jacket color.
- Jacket is Low-Smoke, Zero-Halogen (LSZH) type to reduce toxic smoke in event of a fire.
- The connector has an green connector shell denoting MPO-12/APC.
- MPO-12/APC connectors cannot be used with MPO-12/UPC ultra-flat polish connectors because the fiber polish is different and cannot be matched.
- The split ends can support either OSFP and/or QSFP112 transceivers at the same time depending on the adapter type.

Connector Details


The M4MPOA2x4F fiber cables have 8 individual fibers, 4 in each direction.

The MPO connectors are the angle-polished (APC) type which provide minimal reflection of the optical signal for optimal signal integrity.




Transceivers have alignment pins for precise positioning of the cable connector against the optical beams. The fiber cable has alignment holes matching the transceiver's pins.

MPO Connector with Alignment Holes and Positioning Key:

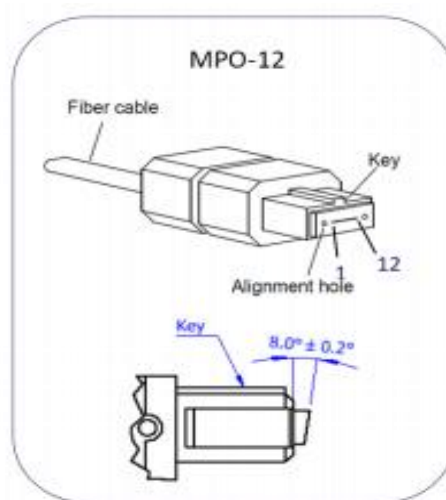

Optical Receptacle and Lane Assignment (transceiver, front view):

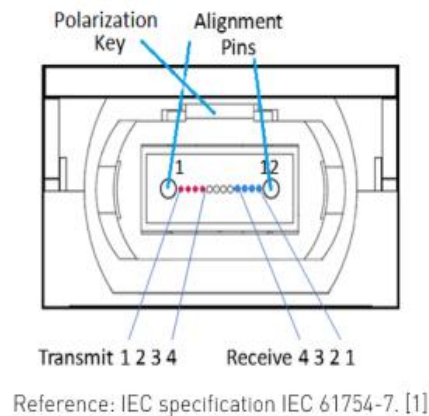

Handling Precautions

The cable is shipped with dust caps which protect the connectors from contamination during shipment and installation. The caps should not be removed until the cable is plugged in at the time of installation. Prior to insertion of the fiber cable into the transceiver, always clean both the cable and the transceiver connector using optical connector cleaners to remove any contamination. Keep the cables away from any Liquids.

Fiber cables have no conductive parts and are not ESD sensitive. However, they plug into ESD sensitive transceivers. Due to that, standard ESD handling precautions must be observed during installation.

Notice

This document is provided for information purposes only and shall not be regarded as a warranty of a certain functionality, condition, or quality of a product. Neither NADDOD make any representations or warranties, expressed or implied, as to the accuracy or completeness of the information contained in this document and assumes no responsibility for any errors contained herein. NADDOD shall have no liability for the consequences or use of such information or for any infringement of patents or other rights of third parties that may result from its use. This document is not a commitment to develop, release, or deliver any material (defined below), code, or functionality.

NADDOD reserves the right to make corrections, modifications, enhancements, improvements, and any other changes to this document, at any time without notice. Customer should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

NADDOD makes no representation or warranty that products based on this document will be suitable for any specified use. Testing of all parameters of each product is not necessarily performed by NADDOD. It is customer's sole responsibility to evaluate and determine the applicability of any information contained in this document, ensure the product is suitable and fit for the application planned by customer, and perform the necessary testing for the application in order to avoid a default of the application or the product.

NADDOD products are sold subject to the NADDOD standard terms and conditions of sale supplied at the time of order acknowledgement, unless otherwise agreed in an individual sales agreement signed by authorized representatives of NADDOD and customer ("Terms of Sale"). NADDOD hereby expressly objects to applying any customer general terms and conditions with regards to the purchase of the NADDOD product referenced in this document. No contractual obligations are formed either directly or indirectly by this document.

Further Information:

Web www.naddod.com

Email For order requirements: sales@naddod.com
For customer service: support@naddod.com
For technical support: tech@naddod.com

For cooperation: agency@naddod.com

For other information: info@naddod.com

Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. NADDOD assumes no responsibility for the use or reliability of equipment or software not provided by NADDOD.

Copyright © NADDOD.COM All Rights